



Product Guide  
**Split System  
and VRF Systems**

AIR CONDITIONING SOLUTIONS







# The Aermec world



Experience, ideas and original solutions; skills and flexibility to meet the various market requests for a well-being that safeguards the environment whilst respecting the very clear values that Giordano Riello always based his choices on after setting up Aermec in 1961.

Giordano Riello International Group (GRIG), that Aermec is part of, boasts a turnover of more than € 440 million, over 1700 employees and 8 production sites, and it distributes its products via a global sales network. With 6 foreign subsidiaries, 55 sales outlets and 81 After Sales Service points in Italy and more than 70 international distributors, Aermec guarantees worldwide cover in terms of consultancy and assistance for every type of clientèle.

## The GRIG Group

**440** *million turnover*

**8** *production sites*

**1750** *Employees*

**6** *foreign subsidiaries*

**55** *sales outlets in Italy*

**81** *After Sales Service points in Italy*

**70** *international distributors*

# Why choose Aermec?

## Design support

Aermec offers a prompt, constant service that guarantees the integration of its products with your design in the best and most efficient way.

### Pre-sales

To guide its customers in the choice of the system most suited to their own specific needs, Aermec has a trained, skilled pre-sales team.

Taking full advantage of the consolidated technical/commercial structure that has proved to be a great benefit over the years for customers in the hydronics sector, the company has chosen to continue with this organisation in the direct expansion field too.

Pre-sales technicians, aided and coordinated by the sales agents and product management, are on hand to offer qualified technical advice, cost estimates and information about products and systems.

## Maintenance and support

To ensure optimum reliability and safety, Aermec has a widespread and highly professional technical assistance network.

Keeping the energy efficiency level constant over time, minimising system downtime and preventing any possible problems or faults are what help to maintain the value of the investment made in the air conditioning system. The members of the Technical Assistance Service (SAT) team are carefully selected to ensure the best professionalism, training and satisfaction for our customers.





# Reliability, sustainability, efficiency and cost-effectiveness

## Skills and innovation in the field of air conditioning and heating

### Aermec courses

Conscious of the need to keep its commercial partners always abreast of developments, Aermec has a complete programme of technical seminars aimed above all at designers, architects and installation firms.

These training courses focus on products using renewable energy forms: numerous seminars of a theoretical and practical nature, plus others explaining the latest changes in the regulations.

### The products

The skills built up with nearly 60 years of experience in this sector are transformed into a range of products and solutions ideal for winter and summer air conditioning, for all energy sources and all applications: residential, commercial and industrial.

Aermec can boast a wide choice of products from 1 kW to 2 MW, including fan coils, chillers and air-cooled or water-cooled heat pumps, air handling units, heat recovery units and high-precision air conditioners.

There is also a comprehensive range of system accessories, and various customer services.



# Refrigerant gas R32

More efficient and eco-compatible



A wonderful little gesture for the future!

Aermec, always ready for change, geared to constant innovation and attentive to environmental issues, has always believed that technological development can help improve people's lives. That's why the new air conditioning lines were created; they use **R32 gas** - a revolutionary refrigerant gas with a low environmental impact that offers enhanced energy efficiency thanks to its excellent thermodynamic characteristics. Compared with the most commonly used refrigerants, R32 gas doesn't harm the ozone layer. It guarantees a 68% reduction in the environmental impact (measured as global warming potential - GWP).

All this is a huge benefit not only for people but, above all for our planet.

## Simplicity

Air conditioners that are easy to install, like the models with R410A refrigerant.

R32 refrigerant gas is 100% pure. Re-use and recycling are much more simple.

## Respect for the environment

Zero impact on the ozone layer.

68% reduction in the impact on global warming.

## Greater efficiency

Reduced costs and greater savings.

30% refrigerant load reduction.

Higher energy efficiency: up to **A+++**.

# High energy efficiency

To pursue the aims of 20/20/20 (20% reduction in CO<sub>2</sub> emissions, 20% increase in the production of energy from renewable sources and 20% reduction in primary energy by 2020), the European Union issued the ErP (Energy related Products) Directive that specifies the minimum efficiency requisites of various devices including air conditioners.


For air conditioners with a power level lower than 12 kW, energy efficiency is now assessed (since 1 January 2013) on the basis of the new seasonal efficiency indicators (SEER for cooling mode and SCOP for heating mode).

The new energy labelling system (also in force since 1 January 2013) is based on these new seasonal efficiency parameters.

The new energy label shows both the Seasonal Efficiency Class of the product (in accordance with EN14825) and the noise values of the indoor and outdoor units.

ENERGY EFFICIENCY CLASS	COOLING
A+++	SEER ≥ 8.50
A++	6.10 ≤ SEER < 8.50
A+	5.60 ≤ SEER < 6.10
A	5.10 ≤ SEER < 5.60
B	4.60 ≤ SEER < 5.10
C	4.10 ≤ SEER < 4.60
D	3.60 ≤ SEER < 4.10
E	3.10 ≤ SEER < 3.60
F	2.60 ≤ SEER < 3.10
G	SEER < 2.60

ENERGY EFFICIENCY CLASS	HEATING
A+++	SCOP ≥ 5.10
A++	4.60 ≤ SCOP < 5.10
A+	4.00 ≤ SCOP < 4.60
A	3.40 ≤ SCOP < 4.00
B	3.10 ≤ SCOP < 3.40
C	2.80 ≤ SCOP < 3.10
D	2.50 ≤ SCOP < 2.80
E	2.20 ≤ SCOP < 2.50
F	1.90 ≤ SCOP < 2.20
G	SCOP < 1.90



# Sustainability

Since its conception, Aermec has made a commitment towards sustainability and reduced environmental impact. Today this philosophy is pursued through a constant technological investment, a clear attention to improving personal comfort and an increasingly oriented mental approach towards continuous progress with minimum carbon footprint.

Aermec is ISO 14001 certified and applies the relevant procedures within its offices and plants promoting recycling, energy conservation and waste reduction.

The innovations in heat recovery and the seasonal energy efficiencies, along with the systems designed to minimise the environmental impact of the entire life cycle by customers, have always represented, and will continue to represent, a fundamental business goal.



# Inverter technology

Aermec's Full Inverter technology offers a multitude of benefits in terms of more precise and constant temperatures, reduced energy consumption, considerable sound reduction and greater reliability.

It's the most modern offering from today's electronic technology in the field of air conditioning.

It's a system that can maintain ideal comfort conditions in the room, activating the air conditioner at variable speed and power levels without the continual starting and stopping typical of traditional devices. Maximum speed and power and, when necessary, a gradual and automatic slowdown to constantly adapt to the requirements in the room without any major leaps.

This means greater comfort due to the absence of rushes of temperature and a sensible seasonal energy savings - up to 30% less - to increase the efficiency of the refrigeration cycle.

In heat pump operation, besides these benefits, there is an additional recovery of efficiency in the stages of reverse cycle and of defrosting of the exterior exchangers.

The microprocessor system keeps all the device operating parameters under control at all times, intervening on the compressor supply frequency in order to avoid faults or malfunctioning.

## Enhanced comfort and notable seasonal energy savings

### Rotary DC inverter compressors


Guarantee greater reliability in terms of energy efficiency and energy savings, along with quiet operation thanks to the reduction in the vibrations generated while the unit is functioning.

### Greater reliability and less maintenance

Extremely precise control of the compressor rotation speed, with a saving of 50% compared with traditional air conditioners.

### DC inverter fan motor

Inverter technology applied to the fan motor, enabling the required temperature to be reached more effectively with a reduced electric charge loss.

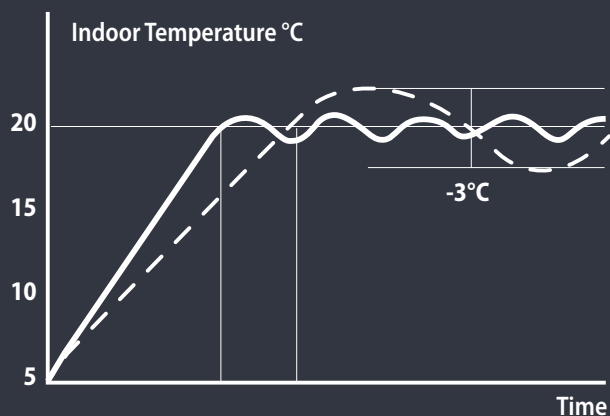

Inverter Model

Traditional Model



# Guaranteed operation

Aermec's split system units guarantee optimum environmental comfort, and can also be used in very cold climates thanks to the **low heating**, **low cooling** and **anti-freeze** functions.

**LOW HEATING:** heating operation with outdoor temperatures down to **-15 °C**

---

**LOW COOLING:** cooling operation with outdoor temperatures down to **-22 °C**

---

**ANTI-FREEZE FUNCTION:** this special function automatically starts the unit up in heating mode as soon as a temperature lower than **8 °C** is detected in the room. It's very handy in buildings located in places where the temperature can fall very low.

---


# Wide air flow adjustment range

**Optimum comfort in every room**

The indoor units have multi-speed fans that allow the set room temperature to be reached with the minimum noise and in the shortest time possible, providing optimum comfort in every room.

**QUIET** function for extremely quiet operation.

**TURBO** function to reach the required temperature as quickly as possible.

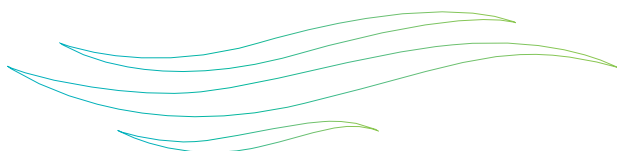

# The ideal environment


Correct air diffusion and constantly maintaining the required temperature in the room are fundamental requisites for ensuring the best comfort for the people concerned.

The **IFEEL** function detects the room temperature using the sensor in the remote control, not the average temperature sensor in the indoor unit. This means more accurate temperature control, greater comfort and boosted energy savings.

# Air distribution

Our indoor units are fitted with motorised horizontal or vertical deflectors, depending on the model.

The new deflectors are designed to eliminate annoying hot or cold air currents, and can be commanded to direct the air flow towards the ceiling (cooling) or floor (heating) to guarantee an even air distribution in the room and ensure the best possible comfort.

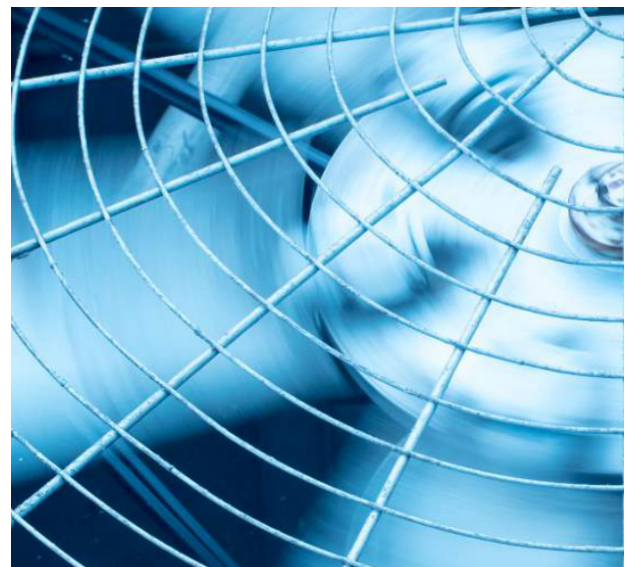





## The comfort of silence

### A silence never heard before

Another reason why the ranges of Aermec air conditioners are so highly appreciated is their particularly quiet operation.

Night-time operation is even less noticeable thanks to the **SLEEP** function, which means enhanced well-being.

This quiet feature is tested in the modern semi-anechoic chamber in the Aermec laboratory, which is fitted out with all the latest equipment.



# We care about your health

In an increasingly polluted world, guaranteeing a high level of air purity has become vital for our health and well-being. Aermec reaches this goal with sophisticated filtering technologies that ensure healthy, clean air at all times.





## Cold Plasma air purifier

Capable of reducing pollutants by means of electric discharges, causing the splitting of the water molecules in the air into positive and negative ions. These ions neutralize the molecules of gaseous pollutants, transforming them into products normally present in clean air. The device is capable of eliminating 90% of bacteria. The result is clean, ionized air, free of foul odours.

### Electrostatic anti-dust filter

Thanks to the electrostatic charge, the filter holds back dust and other impurities and thereby cleans the air. It can be easily removed for normal maintenance work.




# Cold Plasma is active against

- Viruses (flu)
- Certain cigarette smoke compounds
- Spores and mould germs
- Pollen
- Dust
- Pet odours
- Exhaust gas
- Escherichia Coli
- Cladosporium
- Aspergillus

Many of these elements can trigger dangerous breathing fits in people who suffer from asthma and other illnesses.

**Cold Plasma** is an ion generator system ideal for purifying indoor contexts. It deactivates the viruses and bacteria in the air. Unlike electrostatic filters, it has an air purification mechanism that uses a generator to break down some of the water molecules in the air (humidity) by means of an electrical discharge.

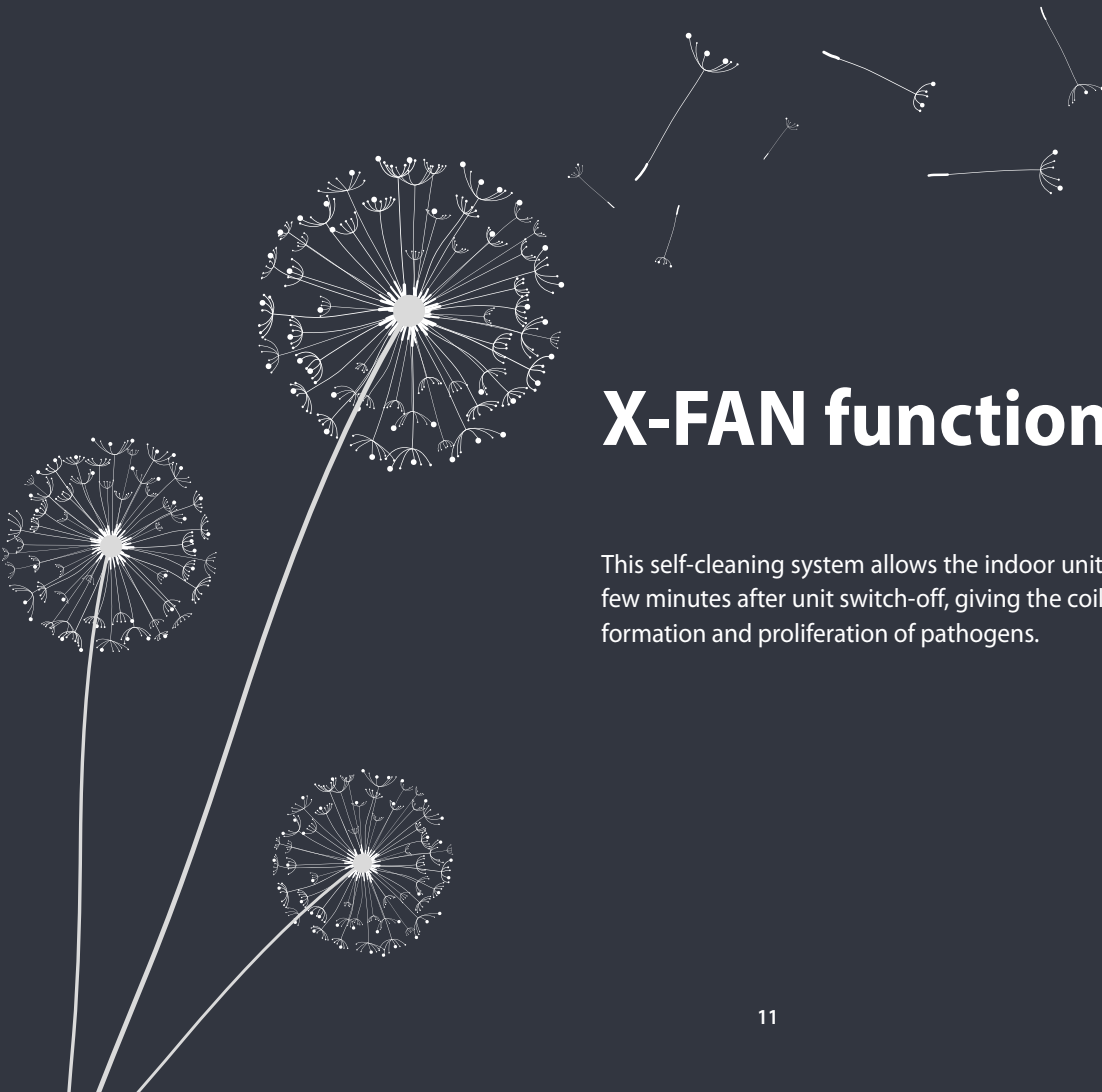

## X-FAN function

This self-cleaning system allows the indoor unit fan to carry on working for a few minutes after unit switch-off, giving the coil time to dry and avoiding the formation and proliferation of pathogens.

# Wi-Fi control

Aermec, a leading manufacturer of air conditioning systems, boasts a wide range of products and offers Wi-Fi control for several types of unit including monosplit, multi-split and heat pump systems.

Plug & Play module to be installed in the indoor unit for Wi-Fi control. With this accessory and the specific EWPE SMART app or NETHOME PLUS app, the system can be controlled directly from your smartphone or tablet, wherever you are. Remote control is possible via Cloud, using a wireless router connected to the Internet.

## EWPE Smart app

EWPE Smart is an app that lets you control and manage your AC system from your smartphone or tablet, even when you're away from home or out of the office.

It was purposely developed for smartphones and tablets, is compatible with iOS and Android systems, and can be downloaded free of charge from App Store or Google Play.



**Download  
the EWPE  
Smart app**







## NETHOME PLUS app

NETHOME PLUS is a modern, dynamic app that allows you to easily control and manage your AC system from your smartphone or tablet, even when you're away from home or out of the office, so you never have to forgo optimum comfort.

This app, purposely developed for smartphones and tablets, is compatible with iOS and Android systems and can be downloaded free of charge from App Store or Google Play.

The NETHOME PLUS app is available for the SGE air conditioning system only.

For more information about the operation or compatibility of the accessory, refer to the documentation available at [www.aermec.it](http://www.aermec.it)



**Download the  
NETHOME  
PLUS app**







# Index

## monosplit 16

PSL.....	18
CMP.....	20
FK.....	22
SMG.....	24
SPG.....	26
SGE.....	28
CKG.....	30
SCG.....	32
MVAS.....	34
LCG.....	36
LCG_D.....	38
LCG_CS.....	40
LCG_C.....	41
LCG_F.....	42

## multisplit 44

MLG.....	46
MLG_D.....	48
MLG_CS / MLG_C.....	49
MLG_F.....	50
MLG_FS.....	51
SLG_W.....	52
SMG_W.....	53
CKG_FS.....	54

MPG.....	60
SPG_W.....	62
SMG_W.....	63
CKG_FS.....	64
MLG_F.....	65
MPG_CS / MPG_C.....	66
MPG_D.....	67
MPG_DH.....	68

## VRF system 70

MVA.....	72
----------	----

## complementary solution 74

DML.....	76
----------	----







**Monosplit**





The **monosplit** air conditioner, consisting of an indoor unit connected to an outdoor unit, heats or cools a single room.

A vast choice not only in terms of models but also alternatives and possibilities, Aermec's monosplit air conditioners cover a wide range of cooling capacity levels from **2.4 kW** to **28.0 kW**, and heating capacity levels from **2.3 kW** to **30.0 kW** and come in cooling-only and heat pump versions.

Equipped with inverter technology, they only use the energy they need, maximising energy savings and ensuring minimal noise levels and increased temperature stability. Quality design and materials and exclusive elegant design complete the range features, ranking Aermec among the leaders on the market.





# PSL

portable packed air conditioner



- **New R290 natural refrigerant gas**
- **Reversible heat pump**
- **Compact, manoeuvrable and quiet**

With their compact, elegant design, **PSL** portable air conditioners are ideal for any type of context. Fitted with wheels so they can be easily moved to wherever they're needed.

Operating mode: cooling, heating, dehumidification, ventilation only.

Equipped with a specific tank for collecting the moisture removed from the air.

The cooled, heated or dehumidified air comes out of the front grille and is directed vertically by mobile fins.

The on-board control panel with display allows to easily and precisely set the desired temperature set-points.



Unit		PSL250		PSL350	
Nominal performance in cooling mode					
Cooling Capacity (1)		kW	2.60	3.40	
EER (2)		W/W	3.10	2.60	
Seasonal efficiency					
Energy efficiency class (3)			A	A	
Nominal performance in heating mode					
Heating capacity (4)		kW	2.30	2.70	
COP (2)		W/W	3.10	2.80	
Seasonal efficiency (temperate climate)					
Energy efficiency class (3)			A+	A+	
Electrical data					
Nominal input power (5)		kW	1,0	1.5	
Nominal input power (5)		A	4,6	8,0	
General data					
Fan					
Type of fan		Type	Centrifugal on/off		
Air flow rate	max/med/min	m³/h	390/360/330		390/360/330
Sound power	max/med/min	dB(A)	64,0/63,5/63,0		64,0/63,5/63,0
Sound pressure (6)	max/med/min	dB(A)	35,0/33,0/31,0		35,0/33,0/31,0
Compressor					
Type of compressor		Type	Rotary on/off		
Refrigerant:		Type	R290	R290	
Refrigerant load		kg	0,2	0,2	
Power supply					
Type of power cable		Type	3G1.0 mm²/L= 2.85 m/Schuko plug	3G1.0 mm2/L= 2.85 m/Schuko plug	
Power supply			220-240V ~ 50Hz		
Hose					
Minimum length		mm	270	270	
Maximum length		mm	1500	1500	
Diameter (out)		mm	145	145	
Condensate Discharge Diameter					
Dimensions		mm	476×385×710	476×385×710	

(1) Cooling (EN 14511 and EN 14825) room air temperature 27 °C d.b. / 19 °C w.b.; Outside air temperature 35 °C; turbo speed; cooling line length 5 m.

(2) EER/COP in accordance with the Standard (EN 14511), only declared for the purposes of the tax deductions in force at the time of this publication.

(3) Data in accordance with delegated regulation (EU) No. 626/2011.

(4) Heating (EN 14511 and EN 14825) Room air temperature 20°C d.b.; Outside air temperature 7 °C d.b.; / 6 °C w.b.; turbo speed; cooling line length 5 m.

(5) The nominal input power (nominal input current) is the maximum electrical input power (maximum input current) to the system, in accordance with standards EN 60335-1 and EN 60335-2-40.

(6) Sound pressure measured in an anechoic chamber at a distance of 1.5m from the front of the unit.



## CMP

packed air conditioner with no outdoor unit



- **Two holes, no outdoor units**
- **Modern design to blend with all furnishing styles**
- **Extremely thin (165 mm deep)**

**CMP** air conditioners are packed units designed to be installed on indoor walls. They blend perfectly with any kind of décor, thanks to their compact and elegant design. The fact that there is no outdoor unit means they can be used in all those cases where architectural restraints prevent the installation of a split air conditioner.

Operating mode: cooling, heating, dehumidification, ventilation only.

It needs no outdoor unit. With just two holes of 162 mm in the outer wall, it can exchange heat with the outside.

The foldable grilles are activated by the inlet and outlet air, opening when the machine is working and closing when it's switched off to guarantee optimum indoor comfort.

The air delivery fin can easily be orientated using the specific button.



Unit			CMP231
<b>Nominal performance in cooling mode</b>			
Cooling Capacity (1)		kW	2.35
Total input power (cooling) (1)		kW	0.73
EER (2)		W/W	3.22
Moisture removed		l/h	1.1
<b>In cooling mode</b>			
Cooling capacity:	value	kW	3.10
<b>Seasonal efficiency</b>			
Energy efficiency class (3)			A+
Annual Power Consumption		kWh/annum	425
<b>Nominal performance in heating mode</b>			
Heating capacity (4)		kW	2.36
Total input power (heating) (4)		kW	0,72
COP (2)		W/W	3.28
<b>Maximum heating performance</b>			
Heating capacity		kW	3.05
<b>Seasonal efficiency (temperate climate)</b>			
Energy efficiency class (3)			A
<b>General data</b>			
<b>Fan</b>			
Type of fan		Type	Inverter centrifugal
Air flow rate (inner side)	max/med/min	m³/h	400/320/270
Air flow rate (outer side)	max/med/min	m³/h	480/390/340
Refrigerant:		Type	R410A
Refrigerant load		kg	0,6
Global heating potential		GWP	2088 kgCO <sub>2</sub> eq
<b>Sound data calculated in cooling mode (5)</b>			
sound power level		dB(A)	58.0
Sound pressure level (1.5 m)		dB(A)	46,0
Condensate Discharge Diameter		mm	13,5
Dimensions		mm	1030×170×555

(1) Cooling (EN 14511 and EN 14825) room air temperature 27 °C d.b. / 19 °C w.b.; Outside air temperature 35 °C; turbo speed; cooling line length 5 m.

(2) EER/COP in accordance with the Standard (EN 14511), only declared for the purposes of the tax deductions in force at the time of this publication.

(3) Data in accordance with delegated regulation (EU) No. 626/2011.

(4) Heating (EN 14511 and EN 14825) Room air temperature 20 °C d.b.; Outside air temperature 7 °C d.b.; / 6 °C w.b.; turbo speed; cooling line length 5 m.

(5) Sound power: calculated on the basis of the measurements taken in accordance with Standard UNI EN ISO 9614-2, as required by Eurovent certification. Sound pressure measured in a free field, 10 m from the external surface of the unit (according to the UNI EN ISO 3744).





# FK

window packed air conditioner



- **New environmentally friendly refrigerant gas R32**
- **Flush-mounting installation on the window**
- **Plug & Play**

The flush-mounting packed air conditioners of the **FK** range for window installation are ideal for commercial contexts such as shops, hotels, offices, laboratories and prefabricated garages. The air filter is easily accessible to enable regular cleaning.

Operating mode: cooling, dehumidification and ventilation only.

Packed Plug & Play unit fitted with a power supply cable with Schuko plug.

Extremely quiet operation.



Unit		FK260		FK360
Nominal performance in cooling mode				
Cooling Capacity (1)		kW	2.70	3.65
Total input power (cooling) (1)		kW	0.78	1.03
EER (2)		W/W	3.45	3.54
Moisture removed		l/h	1,0	1,6
In cooling mode				
Input current (cooling)	value	A	3.5	4,6
Seasonal efficiency				
SEER		W/W	5.20	5.40
Energy efficiency class (3)			A	A
Pdesignc		kW	2.7	3.7
Annual Power Consumption		kWh/annum	182	240
Electrical data				
Nominal input power (4)		kW	1.1	1.3
Nominal input power (4)		A	5.5	6.5
Power supply	220-240V ~ 50Hz			
Inner side				
Fan				
Type of fan		Type	Inverter centrifugal	
Air flow rate (inner side)	max/med/min	m³/h	400/360/320	480/430/380
Sound power (inner side)	max/med/min	dB(A)	59,0/57,0/55,0	59,0/57,0/55,0
Sound power (outer side)	max/med/min	dB(A)	50,0/48,0/46,0	50,0/48,0/46,0
Outer side				
Fan				
Type of fan		Type	Axial inverter	
Air flow rate (outer side)	value	m³/h	800	1200
Sound power (outer side)	max/med/min	dB(A)	65,0/63,0/61,0	65,0/63,0/61,0
Sound power (outer side)	max/med/min	dB(A)	56,0/54,0/52,0	56,0/54,0/52,0
Compressor				
Type of compressor		Type	Rotary Inverter	
Refrigerant:		Type	R32	R32
Refrigerant load		kg	0.5	0,6
Global heating potential		GWP	675kgCO <sub>2</sub> eq	
CO <sub>2</sub> equivalent		t	0.34	0.43
Protection rating			IPX4	IPX4
Dimensions				
Dimensions		mm	560×710×375	660×700×428

(1) Cooling (EN 14511 and EN 14825) room air temperature 27 °C d.b. / 19 °C w.b.; Outside air temperature 35 °C; turbo speed; cooling line length 5 m.

(2) EER/COP in accordance with the Standard (EN 14511), only declared for the purposes of the tax deductions in force at the time of this publication.

(3) Data in accordance with delegated regulation (EU) No. 626/2011.

(4) The nominal input power (nominal input current) is the maximum electrical input power (maximum input current) to the system, in accordance with standards EN 60335-1 and EN 60335-2-40.



# SMG

universal  
wall-mounted installation



- **Air purifier (Cold Plasma)**
- **X-FAN function**
- **Wi-Fi module as standard**

The units of the **SMG\_W** range are designed for indoor wall installation. SMG has a refined, streamlined design. Its curved lines create a structure with an innovative yet practical style. The display showing the operating parameters is elegantly integrated in the champagne-coloured satin cover. The motorised fins direct the air flow in the required direction (both horizontal and vertical) to ensure total comfort in the room. All indoor units can be combined with both multisplit outdoor units of the series MPG and MLG and monosplit outdoor units of the series SMG.

Operating mode: cooling, heating, dehumidification, automatic and ventilation only.

## **Low cooling function:**

cooling with outside temperatures down to -18 °C.

## **Low heating function:**

heating with outside temperatures down to -30 °C.





Indoor Unit			SMG270W	SMG350W
Outdoor unit			SMG270	SMG350
Nominal performance in cooling mode				
Cooling Capacity (1)		kW	2,70	3,53
Total input power (cooling) (1)		kW	0,60	0,88
EER (2)		W/W	4,50	4,00
Moisture removed		l/h	0,8	0,8
Minimum and maximum cooling performance				
Cooling capacity:	min / max	kW	0,30 / 4,30	0,30 / 4,80
Input power (cooling)	min / max	kW	0,13 / 1,30	0,13 / 1,80
Seasonal efficiency				
SEER		W/W	7,50	7,20
Energy efficiency class (3)			A++	A++
Pdesignc		kW	2,7	3,5
Annual Power Consumption		kWh/annum	126	170
Nominal performance in heating mode				
Heating capacity (4)		kW	3,20	4,00
Total input power (heating) (4)		kW	0,78	1,00
COP (2)		W/W	4,10	4,00
Minimum and maximum heating performance				
Heating capacity	min / max	kW	0,60 / 5,90	0,60 / 6,00
Input power (heating mode)	min / max	kW	0,15 / 2,30	0,15 / 2,40
Seasonal efficiency (temperate climate)				
SCOP			4,60	4,60
Energy efficiency class (3)			A++	A++
Pdesignh		kW	2,8	3,0
Annual Power Consumption		kWh/annum	852	913

Indoor Unit			SMG270W	SMG350W
Type of fan		Type	Tangential inverter	
Air flow rate	turbo/max/med max/med/min/min/quiet	m³/h	550/450/390/330/290/250/220	650/500/450/400/330/250/220
Sound power	turbo/max/med max/med/min/min/quiet	dB(A)	58,0/50,0/46,0/42,0/39,0/37,0/34,0	58,0/51,0/47,0/43,0/40,0/37,0/35,0
Sound pressure (5)	turbo/max/med max/med/min/min/quiet	dB(A)	40,0/36,0/32,0/28,0/25,0/23,0/20,0	42,0/37,0/33,0/29,0/26,0/23,0/21,0
Dimensions		mm	860×170×305	860×170×305

Outdoor unit			SMG270	SMG350
Type of fan		Type	Axial inverter	
Air flow rate	value	m³/h	2400	2400
Sound power	value	dB(A)	63,0	63,0
Sound pressure (5)	value	dB(A)	52,0	53,0
Type of compressor		Type	Rotary Inverter	
Refrigerant:		Type	R32	R32
Refrigerant load		kg	0,95	0,90
Global heating potential		GWP	675kgCO <sub>2</sub> eq	675kgCO <sub>2</sub> eq
CO <sub>2</sub> equivalent		t	0,64	0,61
Dimensions		mm	899×378×596	899×378×596

Electrical data				
Nominal input power (6)		kW	2,3	2,4
Nominal input power (6)		A	10,5	10,5
Refrigeration Pipework				
Diameter of liquid refrigerant connections		mm (inch)	6,35 (1/4")	6,35 (1/4")
Diameter of refrigerant gas conn		mm (inch)	9,52 (3/8")	9,52 (3/8")
Maximum refrigerant tube length		m	15	20
Maximum refrigerant line level difference		m	10,0	10,0
Refrigerant to be added		g/m	16	16
Power supply			220-240V ~ 50Hz	220-240V ~ 50Hz

(1) Cooling (EN 14511 and EN 14825) room air temperature 27 °C d.b. / 19 °C w.b.; Outside air temperature 35 °C; turbo speed; cooling line length 5 m.

(2) EER/COP in accordance with the Standard (EN 14511), only declared for the purposes of the tax deductions in force at the time of this publication.

(3) Data in accordance with delegated regulation (EU) No. 626/2011.

(4) Heating (EN 14511 and EN 14825) Room air temperature 20 °C d.b.; Outside air temperature 7 °C d.b.; / 6 °C w.b.; turbo speed; cooling line length 5 m.

(5) Sound pressure measured in an anechoic chamber at a distance of 1.5m from the front of the unit.

(6) The nominal input power (nominal input current) is the maximum electrical input power (maximum input current) to the system, in accordance with standards EN 60335-1 and EN 60335-2-40.



# SPG

monosplit / universal  
wall-mounted installation



- **X-FAN function**
- **Special coil with Blue Fin coating**
- **Possibility of Wi-Fi control, using the accessory**

The units of the **SPG\_W** range are designed for indoor wall installation. SPG has a modern, streamlined design that's ideal with any style of furnishings.

Some indoor units can be combined with both outdoor multisplit units of the MPG range and outdoor monosplit units of the SPG range.

Operating mode: cooling, heating, dehumidification, automatic and ventilation only.

The outdoor unit boasts a compressor with inverter technology.

## ACCESSORIES\*

**DCK:** remote contact kit.

**WIFIKIT:** Plug & Play module for Wi-Fi management.

**WRCA:** wired panel with liquid crystal display and soft-touch buttons.

**CC2:** centralised control (7" touchscreen display).

\* For more information about the accessories and their compatibility, refer to the product data sheet and the specific documentation of the accessory itself.



Indoor Unit			SPG250W	SPG350W	SPG500W	SPG700W
Outdoor unit			SPG250	SPG350	SPG500	SPG700
Nominal performance in cooling mode						
Cooling Capacity (1)		kW	2,50	3,20	4,60	6,20
Total input power (cooling) (1)		kW	0,72	0,99	1,36	1,77
EER (2)		W/W	3,47	3,23	3,39	3,50
Moisture removed		l/h	0,6	1,4	1,8	1,8
Minimum and maximum cooling performance						
Cooling capacity:	min / max	kW	0,50 / 3,25	0,90 / 3,60	1,00 / 5,30	1,60 / 6,90
Input power (cooling)	min / max	kW	0,15 / 1,30	0,22 / 1,30	0,42 / 1,80	0,45 / 2,20
Input current (cooling)	max	A	3,2	4,4	5,9	7,9
Seasonal efficiency						
SEER		W/W	6,50	6,10	6,40	6,80
Energy efficiency class (3)			A++	A++	A++	A++
Annual Power Consumption		kWh/annum	135	184	251	319
Nominal performance in heating mode						
Heating capacity (4)		kW	2,80	3,40	5,20	6,50
Total input power (heating) (4)		kW	0,75	0,91	1,34	1,65
COP (2)		W/W	3,73	3,71	3,88	3,95
Minimum and maximum heating performance						
Heating capacity	min / max	kW	0,50 / 3,50	0,90 / 4,00	1,00 / 5,65	1,30 / 7,91
Input power (heating mode)	min / max	kW	0,14 / 1,50	0,22 / 1,50	0,42 / 1,90	0,45 / 2,20
Input current (heating mode)	max	A	3,2	4,0	5,8	7,3
Efficienza stagionale (clima temperato)						
SCOP			4,00	4,00	4,00	4,00
Energy efficiency class (3)			A+	A+	A+	A+
Annual Power Consumption		kWh/annum	875	945	1295	1645

Indoor Unit			SPG250W	SPG350W	SPG500W	SPG700W
Type of fan		Type	Inverter centrifugal			
Air flow rate	turbo/max/med/min	m³/h	500/470/390/270	590/520/400/320	850/800/700/600	1100/950/750/650
Sound power	turbo/max/med/min	dB(A)	55,0/48,0/44,0/34,0	56,0/49,0/45,0/38,0	54,0/52,0/48,0/44,0	61,0/58,0/52,0/49,0
Sound pressure (5)	turbo/max/med/min	dB(A)	38,0/36,0/32,0/22,0	41,0/37,0/33,0/26,0	44,0/42,0/38,0/34,0	47,0/44,0/38,0/35,0
Condensate Discharge Diameter		mm	16,0	16,0	16,0	16,0
Dimensions		mm	696x251x190	770x251x190	972x300x225	1081x325x248

Outdoor unit			SPG250	SPG350	SPG500	SPG700
Type of fan		Type	Axial inverter			
Air flow rate	max	m³/h	1950	1950	1950	2800
Sound power	max	dB(A)	62,0	64,0	63,0	67,0
Sound pressure (5)	max	dB(A)	51,0	51,0	55,0	58,0
Type of compressor		Type	Rotary Inverter			
Refrigerant:		Type	R32	R32	R32	R32
Refrigerant load		kg	0,50	0,55	0,75	1,30
Global heating potential		GWP	675kgCO <sub>2</sub> eq	675kgCO <sub>2</sub> eq	675kgCO <sub>2</sub> eq	675kgCO <sub>2</sub> eq
CO <sub>2</sub> equivalent		t	0,34	0,37	0,51	0,88
Condensate Discharge Diameter		mm	16,0	16,0	16,0	16,0
Dimensions		mm	732x330x550	732x330x550	732x330x555	873x376x555

Electrical data						
Nominal input power (6)		kW	1,5	1,5	1,9	2,2
Nominal input power (6)		A	7,5	7,5	9,0	10,0
Refrigeration Pipework						
Diameter of liquid refrigerant connections		mm (inch)	6,35 (1/4")	6,35 (1/4")	6,35 (1/4")	6,35 (1/4")
Diameter of refrigerant gas conn		mm (inch)	9,52 (3/8")	9,52 (3/8")	9,52 (3/8")	12,7 (1/2")
Maximum refrigerant tube length		m	15	15	25	25
Maximum refrigerant line level difference		m	10,0	10,0	10,0	10,0
Refrigerant to be added		g/m	16	16	16	16
Power supply			220-240V ~ 50Hz			

(1) Cooling (EN 14511 and EN 14825) room air temperature 27 °C d.b. / 19 °C w.b.; Outside air temperature 35 °C; turbo speed; cooling line length 5 m.

(2) EER/COP in accordance with the Standard (EN 14511), only declared for the purposes of the tax deductions in force at the time of this publication.

(3) Data in accordance with delegated regulation (EU) No. 626/2011.

(4) Heating (EN 14511 and EN 14825) Room air temperature 20 °C d.b.; Outside air temperature 7 °C d.b.; / 6 °C w.b.; turbo speed; cooling line length 5 m.

(5) Sound pressure measured in an anechoic chamber at a distance of 1.5m from the front of the unit.

(6) The nominal input power (nominal input current) is the maximum electrical input power (maximum input current) to the system, in accordance with standards EN 60335-1 and EN 60335-2-40.



# SGE

monosplit  
wall-mounted installation



- **Air purifier (Cold Plasma)**
- **Possibility of Wi-Fi control, using the accessory**
- **X-FAN function**

The units of the **SGE\_W** range are designed for indoor wall installation. SGE has an elegant and essential design. Its curved lines emphasize a kind of structure with innovative and functional style. The display with working parameters is elegantly integrated in the satin-finish cover and visible only when the unit is on.

Operating mode: cooling, heating, dehumidification, automatic and ventilation only.

The outdoor unit boasts a compressor with inverter technology.

## ACCESSORIES\*

**WIFIKEY:** Plug & Play module to be installed in the indoor unit for Wi-Fi control.

\* For more information about the accessories and their compatibility, refer to the product data sheet and the specific documentation of the accessory itself.



Indoor Unit			SGE250W	SGE350W	SGE500W	SGE700W
Outdoor unit			SGE250	SGE350	SGE500	SGE700
Nominal performance in cooling mode						
Cooling Capacity (1)		kW	2,77	3,46	5,27	5,86
Total input power (cooling) (1)		kW	0,77	1,06	1,55	1,81
EER (2)		W/W	3,60	3,25	3,40	3,24
Moisture removed		l/h	1,0	1,2	1,8	2,7
Minimum and maximum cooling performance						
Cooling capacity:	min / max	kW	0,91 / 3,39	1,11 / 4,16	3,39 / 5,83	2,08 / 7,91
Input power (cooling)	min / max	kW	0,10 / 1,24	0,13 / 1,58	0,56 / 2,05	0,42 / 3,15
Input current (cooling)	max	A	3,3	4,6	6,7	7,9
Seasonal efficiency						
SEER		W/W	6,30	6,40	7,40	6,80
Energy efficiency class (3)			A++	A++	A++	A++
Annual Power Consumption		kWh/annum	156	190	247	300
Nominal performance in heating mode						
Heating capacity (4)		kW	2,93	3,57	4,97	6,00
Total input power (heating) (4)		kW	0,73	0,96	1,29	1,61
COP (2)		W/W	4,00	3,71	3,83	3,73
Minimum and maximum heating performance						
Heating capacity	min / max	kW	0,82 / 3,37	1,08 / 4,22	3,10 / 5,85	1,61 / 7,91
Input power (heating mode)	min / max	kW	0,12 / 1,20	0,10 / 1,68	0,78 / 2,00	0,30 / 2,75
Input current (heating mode)	max	A	3,2	4,2	5,6	7,0
Efficienza stagionale (clima temperato)						
SCOP			4,00	4,00	4,00	4,00
Energy efficiency class (3)			A+	A+	A+	A+
Annual Power Consumption		kWh/annum	910	945	1435	1818
Seasonal efficiency (hot climate)						
SCOP			5,10	5,10	5,10	5,00
Energy efficiency class (3)			A+++	A+++	A+++	A++
Annual Power Consumption		kWh/annum	714	686	1260	1705
Indoor Unit			SGE250W	SGE350W	SGE500W	SGE700W
Type of fan		Type				
Air flow rate	max/med/min	m³/h	466/360/325	540/430/314	840/680/540	980/817/662
Sound power	max	dB(A)	54,0	55,0	56,0	59,0
Sound pressure (5)	max/med/min	dB(A)	38,5/32,0/25,0	40,5/34,5/25,0	42,5/36,0/26,0	45,0/40,5/36,0
Dimensions		mm	805x194x285	805x194x285	957x213x302	1040x220x327
Unità esterna			SGE250	SGE350	SGE500	SGE700
Type of fan		Type				
Air flow rate	max	m³/h	1750	1800	2100	3500
Sound power	max	dB(A)	62,0	63,0	63,0	67,0
Sound pressure (5)	max	dB(A)	55,5	56,0	56,0	59,0
Type of compressor		Type				
Refrigerant:		Type	R32	R32	R32	R32
Refrigerant load		kg	0,55	0,55	1,08	1,42
Global heating potential		GWP	675kgCO <sub>2</sub> eq	675kgCO <sub>2</sub> eq	675kgCO <sub>2</sub> eq	675kgCO <sub>2</sub> eq
CO <sub>2</sub> equivalent		t	0,37	0,37	0,73	0,96
Dimensions		mm	720x270x495	720x270x495	805x330x554	890x342x673
Electrical data						
Nominal input power (6)		kW	2,2	2,2	2,5	3,5
Nominal input power (6)		A	10,0	10,0	13,0	15,5
Refrigeration Pipework						
Diameter of liquid refrigerant connections		mm (inch)	6,35 (1/4")	6,35 (1/4")	6,35 (1/4")	9,52 (3/8")
Diameter of refrigerant gas conn		mm (inch)	9,52 (3/8")	9,52 (3/8")	12,7 (1/2")	15,9 (5/8")
Maximum refrigerant tube length		m	25	25	30	50
Maximum refrigerant line level difference		m	10,0	10,0	20,0	25,0
Refrigerant to be added		g/m	12	12	12	24
Power supply			220-240V ~ 50Hz			

(1) Cooling (EN 14511 and EN 14825) room air temperature 27 °C d.b. / 19 °C w.b.; Outside air temperature 35 °C; turbo speed; cooling line length 5 m.

(2) EER/COP in accordance with the Standard (EN 14511), only declared for the purposes of the tax deductions in force at the time of this publication.

(3) Data in accordance with delegated regulation (EU) No. 626/2011.

(4) Heating (EN 14511 and EN 14825) Room air temperature 20 °C d.b.; Outside air temperature 7 °C d.b.; / 6 °C w.b.; turbo speed; cooling line length 5 m.

(5) Sound pressure measured in an anechoic chamber at a distance of 1 m from the front of the unit.

(6) The nominal input power (nominal input current) is the maximum electrical input power (maximum input current) to the system, in accordance with standards EN 60335-1 and EN 60335-2-40.





# CKG

monosplit  
wall-mounted installation



- **X-FAN function**
- **Air purifier (Cold Plasma)**
- **Wi-Fi module as standard**

The units of the **CKG\_FS** range are designed for indoor wall installation. They have a twin-delivery inverter fan unit for optimum air flow control. Some indoor units can be combined with both multisplit outdoor units of the series MPG and MLG and monosplit outdoor units of the series CKG.

Operating mode: cooling, heating, dehumidification, automatic and ventilation only.

## **Low cooling function:**

cooling with outside temperatures down to -15 °C.

## **Low heating function:**

heating with outside temperatures down to -22 °C.

## **ACCESSORIES\***

**WRCA:** wired panel with liquid crystal display and soft-touch buttons.

**CC2:** centralised control (7" touchscreen display).

\* For more information about the accessories and their compatibility, refer to the product data sheet and the specific documentation of the accessory itself.



Indoor Unit			CKG260FS	CKG360FS	CKG500FS
Outdoor unit			CKG260	CKG360	CKG500
<b>Nominal performance in cooling mode</b>					
Cooling Capacity (1)		kW	2.70	3.52	5.20
Total input power (cooling) (1)		kW	0,72	1.00	1.55
EER (2)		W/W	3.75	3.52	3.35
Moisture removed		l/h	0,80	1.20	1.80
<b>Minimum and maximum cooling performance</b>					
Cooling capacity:	min / max	kW	0,70 / 3,40	0,80 / 4,40	1,26 / 6,60
Input power (cooling)	min / max	kW	0,17 / 1,30	0,16 / 1,50	0,38 / 2,45
Input current (cooling)	value	A	3.5	4.5	7,1
<b>Seasonal efficiency</b>					
SEER		W/W	7.20	7.00	6.60
Energy efficiency class (3)			A++	A++	A++
Pdesignc		kW	2.7	3.5	5.2
Annual Power Consumption		kWh/annum	131	175	276
<b>Nominal performance in heating mode</b>					
Heating capacity (4)		kW	2.90	3.80	5.33
Total input power (heating) (4)		kW	0.73	0.96	1.50
COP (2)		W/W	3.97	3.96	3.55
<b>Minimum and maximum heating performance</b>					
Heating capacity	min / max	kW	0,60 / 3,50	1,10 / 4,40	1,12 / 6,80
Input power (heating mode)	min / max	kW	0,13 / 1,35	0,17 / 1,50	0,35 / 2,50
Input current (heating)	value	A	3.6	4.3	6.7
<b>Seasonal efficiency (temperate climate)</b>					
SCOP			4.00	4.10	4.10
Energy efficiency class (3)			A+	A+	A+
Pdesignh		kW	2.6	3.2	5.0
Annual Power Consumption		kWh/annum	910	1093	1750

Indoor Unit			CKG260FS	CKG360FS	CKG500FS
Type of fan		Type	Inverter centrifugal		
Air flow rate	turbo/max/med/min	m³/h	500 / 430 / 370 / 280	600 / 520 / 440 / 360	700 / 650 / 520 / 410
Sound power	turbo/max/med/min	dB(A)	50,0/48,0/44,0/38,0	54,0/50,0/46,0/39,0	57,0/55,0/51,0/47,0
Sound pressure (5)	turbo/max/med/min	dB(A)	39,0/36,0/31,0/26,0	44,0/40,0/36,0/29,0	47,0/45,0/41,0/37,0
Condensate Discharge Diameter		mm	17,0	17,0	17,0
Dimensions		mm	700×215×600	700×215×600	700×215×600

Outdoor unit			CKG260	CKG360	CKG500
Type of fan		Type	Axial inverter		
Air flow rate	value	m³/h	1600	2200	3200
Sound power	value	dB(A)	60.0	62.0	65.0
Sound pressure (5)	value	dB(A)	49,0	52.0	57.0
Type of compressor		Type	Rotary Inverter		
Refrigerant:		Type	R32	R32	R32
Refrigerant load		kg	0.55	0.75	0.95
Global heating potential		GWP	675kgCO <sub>2</sub> eq	675kgCO <sub>2</sub> eq	675kgCO <sub>2</sub> eq
CO <sub>2</sub> equivalent		t	0.37	0,51	0,64
Condensate Discharge Diameter		mm	15,8	15,8	15,8
Dimensions		mm	782×320×540	848×320×596	965×396×700

<b>Electrical data</b>					
Nominal input power (6)		kW	1.35	1.5	2,5
Nominal input power (6)		A	6.0	6.7	11.1
<b>Refrigeration Pipework</b>					
Diameter of liquid refrigerant connections		mm (inch)	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")
Diameter of refrigerant gas conn		mm (inch)	9.52 (3/8")	9.52 (3/8")	12.7 (1/2")
Maximum refrigerant tube length		m	15	20	25
Maximum refrigerant line level difference		m	10.0	10.0	10.0
Refrigerant to be added		g/m	16	16	16
Power supply			220-240V ~ 50Hz		

- (1) Cooling (EN 14511 and EN 14825) room air temperature 27 °C d.b. / 19 °C w.b.; Outside air temperature 35 °C; turbo speed; cooling line length 5 m.  
(2) EER/COP in accordance with the Standard (EN 14511), only declared for the purposes of the tax deductions in force at the time of this publication.  
(3) Data in accordance with delegated regulation (EU) No. 626/2011.  
(4) Heating (EN 14511 and EN 14825) Room air temperature 20°C d.b.; Outside air temperature 7 °C d.b.; / 6 °C w.b.; turbo speed; cooling line length 5 m.  
(5) Sound pressure measured in an anechoic chamber at a distance of 1.5m from the front of the unit.  
(6) The nominal input power (nominal input current) is the maximum electrical input power (maximum input current) to the system, in accordance with standards EN 60335-1 and EN 60335-2-40.



# SCG

monosplit  
free-standing installation



- **Standard Wi-Fi module**
- **Easy installation and maintenance**
- **X-FAN function**

The monosplit air conditioners of the **SCG** range are combined with **SCG\_V** (column) indoor units designed for indoor free-standing installation.

SCG\_V has a modern, elegant design that makes it ideal for any context.

Operating mode: cooling, heating, dehumidification, automatic and ventilation only.

The outdoor unit features a compressor with inverter technology, an electronic valve and an electric heater to ensure correct winter operation and prevent ice formation on the coil.





Indoor Unit			SCG700V	SCG1200V	SCG1200VT
Outdoor unit			SC700	SC1200	SCG1200T
Nominal performance in cooling mode					
Cooling Capacity (1)		kW	7,20	12,50	12,50
Total input power (cooling) (1)		kW	2,05	4,20	3,44
EER (2)		W/W	3,51	2,98	3,63
Moisture removed		l/h	2,0	5,0	5,0
Minimum and maximum cooling performance					
Cooling capacity:	min / max	kW	1,00 / 9,00	3,60 / 13,50	3,60 / 13,50
Input power (cooling)	min / max	kW	0,37 / 3,70	0,36 / 5,40	0,40 / 6,60
Input current (cooling)	max	A	10,0	19,0	5,4
Seasonal efficiency					
SEER		W/W	6,10	5,60	6,10
Energy efficiency class (3)			A++	-	-
Annual Power Consumption		kWh/annum	413	-	-
$\eta_{sc}$		%	-	221,00	246,00
Nominal performance in heating mode					
Heating capacity (4)		kW	7,90	13,50	13,50
Total input power (heating) (4)		kW	2,33	4,20	3,30
COP (2)		W/W	3,39	3,21	4,09
Minimum and maximum heating performance					
Heating capacity	min / max	kW	1,60 / 8,80	2,80 / 14,00	2,80 / 14,00
Input power (heating mode)	min / max	kW	0,32 / 3,90	0,36 / 5,40	0,50 / 6,60
Input current (heating)	max	A	11,0	19,0	5,2
Seasonal efficiency (temperate climate)					
SCOP			4,00	3,70	4,00
Energy efficiency class (3)			A+	-	-
Annual Power Consumption		kWh/annum	2135	-	-
$\eta_{sh}$		%	-	145,00	159,00
Indoor Unit			SCG700V	SCG1200V	SCG1200VT
Input power		W	65	220	220
Type of fan		Type		Inverter centrifugal	
Air flow rate	turbo/max/med/min	m³/h	1250/950/850/750	2000/1850/1700/1580	2400/2200/2000/1800
Sound power	turbo/max/med/min	dB(A)	60,0/51,0/48,0/45,0	66,0/64,0/62,0/61,0	68,0/65,0/63,0/61,0
Sound pressure (5)	turbo/max/med/min	dB(A)	45,0/41,0/38,0/35,0	53,0/51,0/50,0/48,0	57,0/55,0/53,0/51,0
Dimensions		mm	507x320x1770	587x394x1882	587x394x1882
Outdoor unit			SCG700	SCG1200	SCG1200T
Type of fan		Type		Axial inverter	
Air flow rate	max	m³/h	3200	6000	6000
Sound power	max	dB(A)	70,0	74,0	75,0
Sound pressure (5)	max	dB(A)	61,0	64,0	69,0
Type of compressor		Type		Rotary Inverter	
Refrigerant:		Type	R32	R32	R32
Refrigerant load		kg	1,60	2,60	2,60
Global heating potential		GWP	675kgCO <sub>2</sub> eq	675kgCO <sub>2</sub> eq	675kgCO <sub>2</sub> eq
CO <sub>2</sub> equivalent		t	1,08	1,76	1,76
Dimensions		mm	965x396x700	1028x530x822	1028x530x822
Electrical data					
Nominal input power (6)		kW	3,9	5,4	6,6
Nominal input power (6)		A	18,0	22,0	10,0
Refrigeration Pipework					
Diameter of liquid refrigerant connections		mm (inch)	6,35 (1/4")	9,52 (3/8")	9,52 (3/8")
Diameter of refrigerant gas conn		mm (inch)	15,9 (5/8")	15,9 (5/8")	15,9 (5/8")
Maximum refrigerant tube length		m	25	30	30
Maximum refrigerant line level difference		m	10,0	20,0	20,0
Refrigerant to be added		g/m	40	40	40
Indoor Unit Supply			220-240V ~ 50Hz	220-240V ~ 50Hz	380-415V ~ 3N 50Hz
Outdoor Unit Supply			220-240V ~ 50Hz	220-240V ~ 50Hz	380-415V ~ 3N 50Hz

(1) Cooling (EN 14511 and EN 14825) room air temperature 27 °C d.b. / 19 °C w.b.; Outside air temperature 35 °C; turbo speed; cooling line length 5 m.

(2) EER/COP in accordance with the Standard (EN 14511), only declared for the purposes of the tax deductions in force at the time of this publication.

(3) Data in accordance with delegated regulation (EU) No. 626/2011.

(4) Heating (EN 14511 and EN 14825) Room air temperature 20 °C d.b.; Outside air temperature 7 °C d.b.; / 6 °C w.b.; turbo speed; cooling line length 5 m.

(5) Sound pressure measured in an anechoic chamber at a distance of 1.5m from the front of the unit.

(6) The nominal input power (nominal input current) is the maximum electrical input power (maximum input current) to the system, in accordance with standards EN 60335-1 and EN 60335-2-40.

Nota: la quantità di gas refrigerante da aggiungere, si riferisce ad una lunghezza delle linee superiore a 5 m.



# MVAS

high-head duct monosplit  
duct type installation

- **Suitable for long-distance channels**
- **High static pressure that can reach 150 Pa**
- **Special coil with Golden Fin coating**

The monosplit air conditioners of the **MVAS** range are combined with **MVA\_DH** (high-head duct) indoor units designed for horizontal duct-type installation.

Operating mode: cooling, heating, dehumidification, automatic and ventilation only.

The outdoor unit features a compressor with inverter technology, an electronic valve and an electric heater to ensure correct winter operation and prevent ice formation on the coil.



## ACCESSORIES\*

**BACNETGW:** used to manage up to 16 MVA systems with a BACnet serial port.

**MODBUSGW:** used to manage up to 16 MVA systems with a ModBus RTU serial port on RS485.

**USBDC:** the kit includes a CanBus to ModBus converter and the VRF debugger software.

**WRC:** wired panel with liquid crystal display and soft-touch buttons.

**WRC1:** wired panel with liquid crystal display and soft-touch buttons.

\* For more information about the accessories and their compatibility, refer to the product data sheet and the specific documentation of the accessory itself.

Indoor Unit		MVA2240DH	MVA2800DH
Outdoor unit		MVAS2242T	MVAS2802T
Nominal performance in cooling mode			
Cooling Capacity (1)	kW	22,40	28,00
Total input power (cooling) (1)	kW	6.12	7.78
Input current (cooling)	A	10.9	13.9
EER (2)	W/W	3.66	3.60
Nominal performance in heating mode			
Heating capacity (3)	kW	24,00	30,00
Total input power (heating) (3)	kW	4.90	6.12
Input current (heating)	A	8.8	10.9
COP (2)	W/W	4.90	4.90

Indoor Unit		MVAS2240DH	MVAS2800DH
Type of fan	Type	Inverter centrifugal	
Air flow rate	value	m <sup>3</sup> /h	4000
Useful static pressure	rated	Pa	150
Sound power	max/med/min	dB(A)	64,0/62,0/59,0
Sound pressure (4)	max/med/min	dB(A)	54,0/52,0/49,0
Condensate Discharge Diameter	mm	30,0	30,0
Dimensions	mm	1483×791×385	1686×870×450

Outdoor unit		MVAS2242T	MVAS2802T
Type of fan	Type	Axial inverter	
Type of compressor	Type	Rotary Inverter	
Refrigerant:	Type	R410A	R410A
Refrigerant load	kg	5,5	7,1
Global heating potential	GWP	2088 kgCO <sub>2</sub> eq	2088 kgCO <sub>2</sub> eq
Dimensions	mm	940×1430×320	940×1615×460

Electrical data			
Nominal input power (5)	kW	9,6	12,5
Refrigeration Pipework			
Diameter of liquid refrigerant connections	mm (inch)	19.05 (3/4")	22.2 (7/8")
Diameter of refrigerant gas conn	mm (inch)	9.52 (3/8")	9.52 (3/8")
Type of cooling connections	Type	To be soldered	
Outdoor Unit Supply		380-415V ~ 3N ~ 50Hz	380-415V ~ 3N ~ 50Hz

(1) Cooling (EN 14511 and EN 14825) room air temperature 27 °C d.b. / 19 °C w.b.; Outside air temperature 35 °C; turbo speed; cooling line length 5 m.

(2) EER/COP in accordance with the Standard (EN 14511), only declared for the purposes of the tax deductions in force at the time of this publication.

(3) Heating (EN 14511 and EN 14825) Room air temperature 20 °C d.b.; Outside air temperature 7 °C d.b.; / 6 °C w.b.; turbo speed; cooling line length 5 m.

(4) Sound pressure measured in an anechoic chamber at a distance of 1.5m from the front of the unit.

(5) The nominal input power (nominal input current) is the maximum electrical input power (maximum input current) to the system, in accordance with standards EN 60335-1 and EN 60335-2-40.

NB: the quantity of refrigerant gas to be added refers to a line length greater than 5 m.



# LCG

monosplit



- **X-FAN function**
- **1 W of absorption in stand-by**
- **Possibility of Wi-Fi control, using the accessory**

The air conditioners of the **LCG** range are monosplit outdoor units that can be combined with various types of indoor unit:

**LCG\_D** - duct indoor units designed for duct type horizontal indoor installation

**LCG\_CS** and **LCG\_C** - cassette indoor units designed for installation in false indoor ceilings

**LCG\_F** - floor-ceiling indoor units designed for indoor installation on walls or ceilings

Operating mode: cooling, heating, dehumidification, automatic and ventilation only.

#### **Low cooling function:**

cooling with outside temperatures down to -20 °C.

#### **Low heating function:**

heating with outside temperatures down to -20 °C.





## ACCESSORIES\*

**WRC20, WRC30 and WRC40:** wired panel with liquid crystal display and soft-touch buttons.

**CC2:** centralised control (7" touchscreen display). *The use of the CC2 centralised control requires the installation of 1 MINIMODBUS20 for each indoor unit installed.*

**ECD:** this accessory is used to manage indoor unit switch-on/switch-off via the ON-OFF device, using the RS485 communication network.

**WIFIKIT20, WIFIKIT30:** Plug & Play module to be installed in the indoor unit for Wi-Fi control.

**DCG:** this accessory allows the remote control of the main unit functions via a relay externally with third-party loads that are suitably powered and sized.

**MINIMODBUS20:** allows information to be exchanged between the units with BMS systems via a Modbus standard (RTU).

**GLG40S:** air delivery and intake grille measuring 620x620 mm for cassette-type indoor units.

**GLG40:** air delivery and intake grille measuring 950x950 mm for cassette-type indoor units.

\* For more information about the accessories and their compatibility, refer to the product data sheet and the specific documentation of the accessory itself.

## LCG

Outdoor unit			LCG350	LCG500	LCG700	LCG850	LCG1000	LCG1000T	LCG1200	LCG1200T	LCG1400	LCG1400T	LCG1600T	
Fan														
Type of fan		Type	Axial inverter											
Air flow rate	max	m³/h	3000	3000	3600	4000	5900	5900	5900	5900	5900	5900	6600	
Sound power	max	dB(A)	64	65	67	69	70	70	71	71	71	72	72	
Sound pressure (1)	max	dB(A)	50	50	52	53	55	55	55	56	56	57	57	
Compressor														
Type of compressor		Type	Rotary Inverter											
Refrigerant:		Type	R32											
Refrigerant load		kg	0.8	1,0	1,6	1.8	2,5	2,5	2.7	2.7	2,8	2,8	3.6	
Global heating potential		GWP	675kgCO <sub>2</sub> eq											
CO <sub>2</sub> equivalent		t	0,53	0,68	1,08	1.22	1,69	1,69	1,79	1,79	1.89	1.89	2.43	
Refrigeration Pipework														
Diameter of liquid refrigerant connections		mm (inch)	6.35 (1/4")	6.35 (1/4")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	
Diameter of refrigerant gas conn		mm (inch)	9.52 (3/8")	12.7 (1/2")	15.9 (5/8")	15.9 (5/8")	15.9 (5/8")	15.9 (5/8")	15.9 (5/8")	15.9 (5/8")	15.9 (5/8")	15.9 (5/8")	15.9 (5/8")	
Maximum refrigerant tube length		m	30	35	50	50	65	65	75	75	75	75	75	
Maximum refrigerant line level difference		m	15	20	25	25	30	30	30	30	30	30	30	
Refrigerant to be added		g/m	16	16	40	40	40	40	40	40	40	40	40	
Power supply			220-240V ~ 50Hz					380-415V 3N ~ 50Hz	220-240V ~ 50Hz	380-415V 3N ~ 50Hz	220-240V ~ 50Hz	380-415V 3N ~ 50Hz		
Dimensions		mm	818×302×596		892X 340X698	920 X370X790	940X460X820						900X340 X1345	

(1) Sound pressure measured in an anechoic chamber at a distance of 1.5m from the front of the unit.

# LCG\_D

Indoor Unit			LCG350D	LCG500D	LCG700D	LCG850D	LCG1000D	LCG1200D	LCG1400D	
Outdoor unit			LCG350	LCG500	LCG700	LCG850	LCG1000	LCG1200	LCG1400	
Nominal performance in cooling mode										
Cooling Capacity (1)		kW	3.50	5.00	7.00	8.50	10.00	12.10	13.40	
Total input power (cooling) (1)		kW	0.95	1.55	2.10	2.70	3.20	4.10	4.45	
EER (2)		W/W	3.68	3.23	3.33	3.15	3.12	2.95	3.01	
Moisture removed		l/h	0.9	1,6	2.4	3.2	2,8	1.7	3.3	
Minimum and maximum cooling performance										
Cooling capacity:		min / max	kW	0,90/4,00	1,60/5,50	2,40/8,00	2,40/9,00	3,20/11,00	3,60/12,80	6,00/14,20
Input power (cooling)		min / max	kW	0,20/1,35	0,30/1,75	0,40/3,50	0,50/3,95	0,60/4,05	0,70/4,85	0,80/5,50
Input current (cooling)		value	A	4.2	6,3	8.7	12,1	13.9	17,9	19,9
Seasonal efficiency										
SEER		W/W	6.10	6.10	6.80	6.10	6.10	5.80	6.10	
Energy efficiency class (3)			A++	A++	A++	A++	A++	-	-	
Pdesignc		kW	3.5	5.0	7.0	8.5	10.0	-	-	
Annual Power Consumption		kWh/annum	200	277	357	480	571	-	-	
Nominal performance in heating mode										
Heating capacity (4)		kW	4.00	5.50	8.00	8.80	12.00	13.50	15.50	
Total input power (heating) (4)		kW	1.05	1.45	2.25	2.55	3.40	4.10	4.60	
COP (2)		W/W	3.81	3.79	3.56	3.45	3.53	3.29	3.37	
Minimum and maximum heating performance										
Heating capacity		min / max	kW	0,90/4,50	1,50/6,00	2,20/9,00	2,40/9,50	3,00/13,50	3,60/14,50	3,90/16,00
Input power (heating mode)		min / max	kW	0,20/1,35	0,30/1,75	0,45/3,50	0,50/3,95	0,60/4,05	0,70/4,85	0,80/5,50
Seasonal efficiency (temperate climate)										
SCOP			4.00	4.00	4.00	4.00	4.00	-	-	
Energy efficiency class (3)			A+	A+	A+	A+	A+	-	-	
Pdesignh		kW	3.1	4.2	6.4	7,2	9.0	-	-	
Annual Power Consumption		kWh/annum	1110	1469	2238	2576	3147	-	-	
Electrical data										
Nominal input power (5)		kW	1.4	1.8	3.5	4.0	4,1	4.9	5.5	
Nominal input power (5)		A	6.0	8,0	16.0	18.0	18.5	22.0	25.0	
Fan										
Type of fan		Type	Inverter centrifugal							
Air flow rate		turbo/max/med/min	m³/h	650/600/510/450	950/880/820/700	1200/1160/1090/940	1500/1350/1130/950	1800/1520/1380/1270	2000/1730/1570/1400	2200/2000/1730/1490
High static pressure		nominal/min/max	Pa	25/0/50	25/0/50	25/0/75	37/0/75	37/0/150	50/0/150	50/0/150
Sound pressure (6)		turbo/max/med/min	dB(A)	41,0/38,0/36,0/34,0	43,0/42,0/39,0/36,0	40,0/39,0/37,0/32,0	42,0/40,0/37,0/35,0	46,0/44,0/42,0/40,0	42,0/40,0/39,0/37,0	43,0/41,0/40,0/38,0
Refrigeration Pipework										
Diameter of liquid refrigerant connections		mm (inch)	6.35 (1/4")	6.35 (1/4")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	
Diameter of refrigerant gas conn		mm (inch)	9.52 (3/8")	12.7 (1/2")	15.9 (5/8")	15.9 (5/8")	15.9 (5/8")	15.9 (5/8")	15.9 (5/8")	
Condensate Discharge Diameter		mm	26,0	26,0	26,0	26,0	26,0	26,0	26,0	
Power supply			220-240V ~ 50Hz							
Dimensions		mm	700x450x200	1000x450x200	1300x450x220	1300x450x220	1000x700x300	1400x700x300	1400x700x300	

(1) Cooling (EN 14511 and EN 14825) room air temperature 27 °C d.b. / 19 °C w.b.; Outside air temperature 35 °C; turbo speed; cooling line length 5 m.

(2) EER/COP in accordance with the Standard (EN 14511), only declared for the purposes of the tax deductions in force at the time of this publication.

(3) Data in accordance with delegated regulation (EU) No. 626/2011.

(4) Heating (EN 14511 and EN 14825) Room air temperature 20°C d.b.; Outside air temperature 7 °C d.b.; / 6 °C w.b.; turbo speed; cooling line length 5 m.

(5) The nominal input power (nominal input current) is the maximum electrical input power (maximum input current) to the system, in accordance with standards EN 60335-1 and EN 60335-2-40.

(6) Sound pressure measured in an anechoic chamber at a distance of 1.5m from the front of the unit.

Indoor Unit		LCG1000D	LCG1200D	LCG1400D	LCG1600D
Outdoor unit		LCG1000T	LCG1200T	LCG1400T	LCG1600T
<b>Nominal performance in cooling mode</b>					
Cooling Capacity (1)	kW	10.00	12.10	13.40	16.00
Total input power (cooling) (1)	kW	3.15	3.80	4.70	5.45
EER (2)	W/W	3.17	3.18	2.85	2.94
Moisture removed	l/h	2,8	2.0	3.6	4.3
<b>Minimum and maximum cooling performance</b>					
Cooling capacity:	min / max	kW	3,20/11,00	3,60/12,80	6,00/14,20
Input power (cooling)	min / max	kW	0,60/4,05	0,60/5,30	0,80/5,95
Input current (cooling)	value	A	4.8	5.3	7,2
<b>Seasonal efficiency</b>					
SEER	W/W	6.10	5.80	5.60	6.10
Energy efficiency class (3)		A++	-	-	-
Pdesignc	kW	10.0	-	-	-
Annual Power Consumption	kWh/annum	577	-	-	-
<b>Nominal performance in heating mode</b>					
Heating capacity (4)	kW	12.00	13.50	15.50	17.00
Total input power (heating) (4)	kW	3.50	3.90	4.45	5.00
COP (2)	W/W	3.43	3.46	3.48	3.40
<b>Minimum and maximum heating performance</b>					
Heating capacity	min / max	kW	3,00/13,50	3,60/14,50	3,90/16,00
Input power (heating mode)	min / max	kW	0,60/4,05	0,60/5,30	0,80/5,95
<b>Seasonal efficiency (temperate climate)</b>					
SCOP		4.00	-	-	-
Energy efficiency class (3)		A+	-	-	-
Pdesignh	kW	9.0	-	-	-
Annual Power Consumption	kWh/annum	3218	-	-	-
<b>Electrical data</b>					
Nominal input power (5)	kW	4.7	5.3	6.0	6.0
Nominal input power (5)	A	7.0	8,0	9.0	9.0
<b>Fan</b>					
Type of fan	Type	Inverter centrifugal			
Air flow rate	turbo/max/med/min	m³/h	1800/1520/1380/1270	2000/1730/1570/1400	2200/2000/1730/1490
High static pressure	nominal/min/max	Pa	37/0/150	50/0/150	50/0/150
Sound pressure (6)	turbo/max/med/min	dB(A)	46,0/44,0/42,0/40,0	42,0/40,0/39,0/37,0	43,0/41,0/40,0/38,0
<b>Refrigeration Pipework</b>					
Diameter of liquid refrigerant connections	mm (inch)	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")
Diameter of refrigerant gas conn	mm (inch)	15.9 (5/8")	15.9 (5/8")	15.9 (5/8")	15.9 (5/8")
Condensate Discharge Diameter	mm	26,0	26,0	26,0	26,0
Power supply	380-415V 3N~50Hz				
Dimensions	mm	1000x700x300	1400x700x300	1400x700x300	1400x700x300

(1) Cooling (EN 14511 and EN 14825) room air temperature 27 °C d.b. / 19 °C w.b.; Outside air temperature 35 °C; turbo speed; cooling line length 5 m.

(2) EER/COP in accordance with the Standard (EN 14511), only declared for the purposes of the tax deductions in force at the time of this publication.

(3) Data in accordance with delegated regulation (EU) No. 626/2011.

(4) Heating (EN 14511 and EN 14825) Room air temperature 20°C d.b.; Outside air temperature 7 °C d.b.; / 6 °C w.b.; turbo speed; cooling line length 5 m.

(5) The nominal input power (nominal input current) is the maximum electrical input power (maximum input current) to the system, in accordance with standards EN 60335-1 and EN 60335-2-40.

(6) Sound pressure measured in an anechoic chamber at a distance of 1.5m from the front of the unit.

# LCG\_CS

Indoor Unit			LCG350CS	LCG500CS
Outdoor unit			LCG350	LCG500
Nominal performance in cooling mode				
Cooling Capacity (1)		kW	3.50	5.00
Total input power (cooling) (1)		kW	0.95	1,56
EER (2)		W/W	3.50	3.21
Moisture removed		l/h	1,0	1.8
Minimum and maximum cooling performance				
Cooling capacity:	min / max	kW	0,90/4,00	1,60/5,50
Input power (cooling)	min / max	kW	0,20/1,35	0,30/1,75
Input current (cooling)	value	A	4.5	6.8
Seasonal efficiency				
SEER		W/W	5.90	5.90
Energy efficiency class (3)			A+	A+
Pdesignc		kW	3.5	5.0
Annual Power Consumption		kWh/annum	213	296
Nominal performance in heating mode				
Heating capacity (4)		kW	4.00	5.50
Total input power (heating) (4)		kW	1.05	1.65
COP (2)		W/W	3.81	3.33
Minimum and maximum heating performance				
Heating capacity	min / max	kW	0,90/4,50	1,50/6,00
Input power (heating mode)	min / max	kW	0,20/1,35	0,30/1,75
Input current (heating)	value	A	4.7	7,2
Seasonal efficiency (temperate climate)				
SCOP			4.00	4.00
Energy efficiency class (3)			A+	A+
Pdesignh		kW	3.1	4.0
Annual Power Consumption		kWh/annum	1069	1405
Electrical data				
Nominal input power (5)		kW	1.35	1,75
Nominal input power (5)		A	6.0	8,0
Fan				
Type of fan		Type	Inverter centrifugal	
Air flow rate	turbo/max/med/min	m³/h	650/580/480/400	700/580/480/400
Sound pressure (6)	turbo/max/med/min	dB(A)	41,0/39,0/36,0/33,0	44,0/39,0/36,0/33,0
Refrigeration Pipework				
Diameter of liquid refrigerant connections		mm (inch)	6.35 (1/4")	6.35 (1/4")
Diameter of refrigerant gas conn		mm (inch)	9.52 (3/8")	12.7 (1/2")
Condensate Discharge Diameter		mm	31.0	31.0
Power supply			220-240V ~ 50Hz	220-240V ~ 50Hz
Dimensions		mm	570x570x265	570x570x265

(1) Cooling (EN 14511 and EN 14825) room air temperature 27 °C d.b. / 19 °C w.b.; Outside air temperature 35 °C; turbo speed; cooling line length 5 m.

(2) EER/COP in accordance with the Standard (EN 14511), only declared for the purposes of the tax deductions in force at the time of this publication.

(3) Data in accordance with delegated regulation (EU) No. 626/2011.

(4) Heating (EN 14511 and EN 14825) Room air temperature 20°C d.b.; Outside air temperature 7 °C d.b.; / 6 °C w.b.; turbo speed; cooling line length 5 m.

(5) The nominal input power (nominal input current) is the maximum electrical input power (maximum input current) to the system, in accordance with standards EN 60335-1 and EN 60335-2-40.

(6) Sound pressure measured in an anechoic chamber at a distance of 1.5m from the front of the unit.



# LCG\_C

Indoor Unit		LCG700C	LCG850C	LCG1000C	LCG1000C	LCG1200C	LCG1200C	LCG1400C	LCG1400C	LCG1600C		
Outdoor unit		LCG700	LCG850	LCG1000	LCG1000T	LCG1200	LCG1200T	LCG1400	LCG1400T	LCG1600T		
Nominal performance in cooling mode												
Cooling Capacity (1)		kW	7.00	8.50	10.00	10.00	12.10	12.10	13.40	13.40	14.50	
Total input power (cooling) (1)		kW	2.05	2.80	3.15	3.00	4.10	4.05	4.65	4.70	5.20	
EER (2)		W/W	3.41	3,04	3.17	3.33	2.95	2.99	2.88	2.85	2.79	
Moisture removed		l/h	2.4	2,9	3.5	4.0	4,1	4.0	4.7	4.3	5.3	
Minimum and maximum cooling performance												
Cooling capacity:		min / max	kW	2,40/8,00	2,40/9,00	3,20/11,00	3,20/11,00	3,60/12,80	3,60/12,80	6,00/14,20	6,00/14,20	6,50/15,00
Input power (cooling)		min / max	kW	0,40/3,50	0,50/3,95	0,60/4,05	0,60/4,05	0,70/4,85	0,60/5,30	0,80/5,50	0,80/5,95	0,85/5,95
Input current (cooling)		value	A	8.8	12.7	13,8	5.0	17.5	5,9	20,8	7,2	7,6
Seasonal efficiency												
SEER		W/W	7.20	6.10	6.10	6.10	6.10	6.10	6.10	6.10	6.10	
Energy efficiency class (3)			A++	A++	A++	A++	-	-	-	-	-	
Pdesignc		kW	7.0	8.5	10.0	10.0	-	-	-	-	-	
Annual Power Consumption		kWh/ annum	340	472	566	553	-	-	-	-	-	
Nominal performance in heating mode												
Heating capacity (4)		kW	8.00	8.80	12.00	12.00	13.50	13.50	15.50	15.50	17.00	
Total input power (heating) (4)		kW	2.20	2.65	3.55	3.40	4.20	4.15	4.35	4.45	4.80	
COP (2)		W/W	3.64	3.32	3.38	3.53	3.21	3.25	3.56	3.48	3.54	
Minimum and maximum heating performance												
Heating capacity		min / max	kW	2,20/9,00	2,40/9,50	3,00/13,50	3,00/13,50	3,60/14,50	3,60/14,50	3,90/16,00	3,90/16,00	4,50/17,50
Input power (heating mode)		min / max	kW	0,45/3,50	0,50/3,95	0,60/4,05	0,60/4,05	0,70/4,85	0,60/5,30	0,80/5,50	0,80/5,95	0,85/5,95
Seasonal efficiency (temperate climate)												
SCOP			3.9	4.0	4.0	4.0	3.8	3.8	3.6	4.0	3.8	
Energy efficiency class (3)			A	A+	A+	A+	-	-	-	-	-	
Pdesignh		kW	6.4	7,2	9.0	9.0	-	-	-	-	-	
Annual Power Consumption		kWh/ annum	2297	2616	3139	3168	-	-	-	-	-	
Electrical data												
Nominal input power (5)		kW	3.5	4.0	4,1	4.7	4.9	5.3	5.5	6.0	6.0	
Nominal input power (5)		A	16.0	18.0	18.5	7.0	22.0	8,0	25.0	9.0	9.0	
Fan												
Type of fan		Type	Inverter centrifugal									
Air flow rate		turbo/max/med/min	m³/h	1100/1050/960/870	1400/1310/1180/1040	1500/1470/1380/1220	1500/1470/1380/1220	1800/1690/1470/1260	1800/1690/1470/1260	1900/1690/1480/1140	1900/1690/1480/1140	2000/1880/1620/1430
Sound pressure (6)		turbo/max/med/min	dB(A)	43,0/42,0/40,0/39,0	49,0/47,0/44,0/41,0	50,0/48,0/46,0/42,0	50,0/48,0/46,0/42,0	51,0/49,0/46,0/42,0	51,0/49,0/46,0/42,0	52,0/51,0/48,0/45,0	52,0/51,0/48,0/45,0	54,0/52,0/50,0/48,0
Refrigeration Pipework												
Diameter of liquid refrigerant connections		mm (inch)	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	
Diameter of refrigerant gas conn		mm (inch)	15.9 (5/8")	15.9 (5/8")	15.9 (5/8")	15.9 (5/8")	15.9 (5/8")	15.9 (5/8")	15.9 (5/8")	15.9 (5/8")	15.9 (5/8")	
Condensate Discharge Diameter		mm	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	30.0	
Power supply			220-240V ~ 50Hz			380-415V 3N~50Hz	220-240V ~ 50Hz	380-415V 3N~50Hz	220-240V ~ 50Hz	380-415V 3N~50Hz		
Dimensions		mm	840x840x240						840x840x290			

- (1) Cooling (EN 14511 and EN 14825) room air temperature 27 °C d.b. / 19 °C w.b.; Outside air temperature 35 °C; turbo speed; cooling line length 5 m.  
 (2) EER/COP in accordance with the Standard (EN 14511), only declared for the purposes of the tax deductions in force at the time of this publication.  
 (3) Data in accordance with delegated regulation (EU) No. 626/2011.  
 (4) Heating (EN 14511 and EN 14825) Room air temperature 20°C d.b.; Outside air temperature 7 °C d.b.; / 6 °C w.b.; turbo speed; cooling line length 5 m.  
 (5) The nominal input power (nominal input current) is the maximum electrical input power (maximum input current) to the system, in accordance with standards EN 60335-1 and EN 60335-2-40.  
 (6) Sound pressure measured in an anechoic chamber at a distance of 1.5m from the front of the unit.

# LCG\_F

Indoor Unit		LCG350F		LCG500F		LCG700F		LCG850F		LCG1000F		LCG1200F		LCG1400F	
Outdoor unit		LCG350		LCG500		LCG700		LCG850		LCG1000		LCG1200		LCG1400	
Nominal performance in cooling mode															
Cooling Capacity (1)		kW	3.50	5.00	7.00	8.50	10.00	12.10	13.40						
Total input power (cooling) (1)		kW	0.95	1.55	1.90	2.80	3.30	3.90	4.40						
EER (2)		W/W	3.89	3.23	3.68	3,04	3.03	3.10	3.05						
Moisture removed		l/h	0.5	1,6	1.4	2.6	3.1	3.3	3.3						
Minimum and maximum cooling performance															
Cooling capacity:		min / max	kW	0,90/4,00	1,60/5,50	2,40/8,00	2,40/9,00	3,20/11,00	3,60/12,80	6,00/14,20					
Input power (cooling)		min / max	kW	0,20/1,35	0,30/1,75	0,40/3,50	0,50/3,95	0,60/4,05	0,70/4,85	0,80/5,50					
Input current (cooling)		value	A	4.0	6.5	8,6	12.7	14.5	15.7	19.5					
Seasonal efficiency															
SEER		W/W	6.7	6.1	6.8	6.1	6.1	6.1	6.1	6,3					
Energy efficiency class (3)			A++	A++	A++	A++	A++	A++	-	-					
Pdesignc		kW	3.5	5.0	7.0	8.5	10.0	-	-						
Annual Power Consumption		kWh/ annum	177	284	359	477	573	-	-						
Nominal performance in heating mode															
Heating capacity (4)		kW	4.00	5.50	8.00	8.80	12.00	13.50	15.50						
Total input power (heating) (4)		kW	1.05	1.60	2.45	2.65	3.60	3.95	4.35						
COP (2)		W/W	4.21	3.44	3.27	3.32	3.33	3.42	3.56						
Minimum and maximum heating performance															
Heating capacity		min / max	kW	0,90/4,50	1,50/6,00	2,20/9,00	2,40/9,50	3,00/13,50	3,60/14,50	3,90/16,00					
Input power (heating mode)		min / max	kW	0,20/1,35	0,30/1,75	0,45/3,50	0,50/3,95	0,60/4,05	0,70/4,85	0,80/5,50					
Seasonal efficiency (temperate climate)															
SCOP			4.0	4.0	3.9	4.0	4.0	3.8	3.7						
Energy efficiency class (3)			A+	A+	A	A+	A+	-	-						
Pdesignh		kW	3.1	4.0	6.4	7,2	9.0	-	-						
Annual Power Consumption		kWh/ annum	1040	1394	2295	2577	3149	-	-						
Electrical data															
Nominal input power (5)		kW	1.4	1.8	3.5	4.0	4,1	4.9	5.5						
Nominal input power (5)		A	6.0	8,0	16.0	18.0	18.5	22.0	25.0						
Fan															
Type of fan		Type	Inverter centrifugal												
Air flow rate		turbo/max/med/min	m³/h	650/610/530/460	850/800/700/600	1300/1220/1090/940	1500/1380/1200/1020	1600/1500/1350/1260	1800/1700/1540/1400	2100/2000/1800/1480					
Sound pressure (6)		turbo/max/med/min	dB(A)	39,0/36,0/32,0/28,0	44,0/42,0/39,0/36,0	45,0/44,0/41,0/38,0	49,0/47,0/43,0/39,0	49,0/47,0/45,0/43,0	49,0/47,0/44,0/42,0	52,0/50,0/48,0/44,0					
Refrigeration Pipework															
Diameter of liquid refrigerant connections		mm (inch)	6.35 (1/4")	6.35 (1/4")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")						
Diameter of refrigerant gas conn		mm (inch)	9.52 (3/8")	12.7 (1/2")	15.9 (5/8")	15.9 (5/8")	15.9 (5/8")	15.9 (5/8")	15.9 (5/8")						
Condensate Discharge Diameter		mm	17,0	17,0	17,0	17,0	17,0	17,0	17,0						
Power supply			220-240V ~ 50Hz												
Dimensions		mm	870x235x665	870x235x665	1200x235x665	1200x235x665	1200x235x665	1570x235x665	1570x235x665						

(1) Cooling (EN 14511 and EN 14825) room air temperature 27 °C d.b. / 19 °C w.b.; Outside air temperature 35 °C; turbo speed; cooling line length 5 m.

(2) EER/COP in accordance with the Standard (EN 14511), only declared for the purposes of the tax deductions in force at the time of this publication.

(3) Data in accordance with delegated regulation (EU) No. 626/2011.

(4) Heating (EN 14511 and EN 14825) Room air temperature 20 °C d.b.; Outside air temperature 7 °C d.b.; / 6 °C w.b.; turbo speed; cooling line length 5 m.

(5) The nominal input power (nominal input current) is the maximum electrical input power (maximum input current) to the system, in accordance with standards EN 60335-1 and EN 60335-2-40.

(6) Sound pressure measured in an anechoic chamber at a distance of 1.5m from the front of the unit.

Indoor Unit			LCG1000F	LCG1200F	LCG1400F	LCG1600F	
Outdoor unit			LCG1000T	LCG1200T	LCG1400T	LCG1600T	
Nominal performance in cooling mode							
Cooling Capacity (1)		kW	10.00	12.10	13.40	16,00	
Total input power (cooling) (1)		kW	3.30	4.05	4.30	5.40	
EER (2)		W/W	3.03	2.99	3.12	2.96	
Moisture removed		l/h	3.5	3.5	3.4	5,9	
Minimum and maximum cooling performance							
Cooling capacity:		min / max	kW	3,20/11,0	3,60/12,80	6,00/14,20	6,35/16,50
Input power (cooling)		min / max	kW	0,60/4,05	0,60/5,30	0,80/5,95	0,85/5,95
Input current (cooling)		value	A	5.1	5,9	6,6	7,7
Seasonal efficiency							
SEER		W/W	6.1	6.1	6.1	6.1	
Energy efficiency class (3)			A++	-	-	-	
Pdesignc		kW	10.0	-	-	-	
Annual Power Consumption		kWh/annum	561	-	-	-	
Nominal performance in heating mode							
Heating capacity (4)		kW	12.00	13.50	15.50	17.00	
Total input power (heating) (4)		kW	3.50	4.00	4.40	5.40	
COP (2)		W/W	3.43	3.38	3.52	3.15	
Minimum and maximum heating performance							
Heating capacity		min / max	kW	3,00/13,50	3,60/14,50	3,90/16,00	4,50/17,50
Input power (heating mode)		min / max	kW	0,60/4,05	0,60/5,30	0,80/5,95	0,85/5,95
Seasonal efficiency (temperate climate)							
SCOP			4.0	3.8	4.0	4.0	
Energy efficiency class (3)			A+	-	-	-	
Pdesignh		kW	9.0	-	-	-	
Annual Power Consumption		kWh/annum	3146	-	-	-	
Electrical data							
Nominal input power (5)		kW	4.7	5.3	6.0	6.0	
Nominal input power (5)		A	7.0	8,0	9.0	9.0	
Fan							
Type of fan		Type	Inverter centrifugal				
Air flow rate		turbo/max/med/min	m³/h	1600/1500/1350/1260	1800/1700/1540/1400	2100/2000/1800/1480	2300/2200/1870/1590
Sound pressure (6)		turbo/max/med/min	dB(A)	49,0/47,0/45,0/43,0	49,0/47,0/44,0/42,0	52,0/50,0/48,0/44,0	54,0/53,0/49,0/45,0
Refrigeration Pipework							
Diameter of liquid refrigerant connections		mm (inch)	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")	
Diameter of refrigerant gas conn		mm (inch)	15.9 (5/8")	15.9 (5/8")	15.9 (5/8")	15.9 (5/8")	
Condensate Discharge Diameter		mm	17,0	17,0	17,0	17,0	
Power supply			380-415V 3N~50Hz				
Dimensions		mm	1200x235x665	1570x235x665	1570x235x665	1570x235x665	

(1) Cooling (EN 14511 and EN 14825) room air temperature 27 °C d.b. / 19 °C w.b.; Outside air temperature 35 °C; turbo speed; cooling line length 5 m.

(2) EER/COP in accordance with the Standard (EN 14511), only declared for the purposes of the tax deductions in force at the time of this publication.

(3) Data in accordance with delegated regulation (EU) No. 626/2011.

(4) Heating (EN 14511 and EN 14825) Room air temperature 20°C d.b.; Outside air temperature 7 °C d.b.; / 6 °C w.b.; turbo speed; cooling line length 5 m.

(5) The nominal input power (nominal input current) is the maximum electrical input power (maximum input current) to the system, in accordance with standards EN 60335-1 and EN 60335-2-40.

(6) Sound pressure measured in an anechoic chamber at a distance of 1.5m from the front of the unit.





**Multisplit**





**Multisplit** air conditioners are formed of an outdoor unit connected to up to 5 indoor units. It heats or cools multiple environments simultaneously.

Aermec's multisplit air conditioners have a cooling capacity range from **4.1 kW to 13 kW**, and there is a reversible heat pump version as well. Equipped with efficient DC inverter compressors and innovative technology, these air conditioners guarantee energy savings, reduced variations in temperature and exceptionally low noise levels. The special pre-charged electrostatic filter ensures that the conditioned air is even more clean and healthy. Its filtration efficiency is remarkable - up to ten times that of a normal filter, even on smaller per particles.





# MLG

multisplit

## ACCESSORIES\*

**WRCA:** wired panel with liquid crystal display and soft-touch buttons.

**CC2:** centralised control (7" touchscreen display).

**WIFIKIT, WIFIKIT10:** Plug & Play module to be installed in the indoor unit for Wi-Fi control.

**DCK:** remote contact kit.

**GL40S:** air delivery and intake grille measuring 600x600 mm for cassette-type indoor units.

**GL40:** air delivery and intake grille measuring 840x840 mm for cassette-type indoor units.

\* For more information about the accessories and their compatibility, refer to the product data sheet and the specific documentation of the accessory itself.



Outdoor unit		MLG420	MLG520	MLG630	MLG730	MLG840	MLG1040	MLG1250
<b>Nominal performance in cooling mode</b>								
Cooling Capacity (1)	kW	4,10	5,20	6,10	7,10	8,00	10,50	12,00
Total input power (cooling) (1)	kW	1,20	1,45	1,74	1,95	2,30	3,10	3,45
EER (2)	W/W	3,42	3,59	3,51	3,64	3,48	3,39	3,48
<b>Minimum and maximum cooling performance</b>								
Cooling capacity:	min / max	kW	2,05/4,40	2,14/5,80	2,20/7,33	2,29/8,50	2,29/10,26	2,60/13,00
Input power (cooling)	min / max	kW	0,55/1,40	0,55/1,56	0,95/2,39	1,10/2,87	1,20/3,58	1,60/4,00
<b>Seasonal efficiency</b>								
SEER	W/W	6,10	6,10	6,10	6,10	6,10	6,10	6,10
Energy efficiency class (3)		A++	A++	A++	A++	A++	A++	A++
Pdesignc	kW	4,1	5,2	6,1	7,1	8,0	10,5	12,0
Annual Power Consumption	kWh/annum	235	298	350	407	459	602	689
<b>Nominal performance in heating mode</b>								
Heating capacity (4)	kW	4,40	5,40	6,50	8,50	9,50	12,00	13,00
Total input power (heating) (4)	kW	1,02	1,30	1,60	2,20	2,65	3,20	3,50
COP (2)	W/W	4,31	4,15	4,06	3,86	3,58	3,75	3,71
<b>Minimum and maximum heating performance</b>								
Heating capacity	min / max	kW	2,49/5,42	2,58/5,92	3,61/8,50	3,66/8,79	3,66/10,26	2,60/14,50
Input power (heating mode)	min / max	kW	0,60/1,78	0,78/1,78	0,78/2,87	0,98/2,87	1,00/2,87	1,71/4,00
<b>Seasonal efficiency (temperate climate)</b>								
SCOP		4,00	4,00	4,00	4,00	4,00	4,00	4,00
Energy efficiency class (3)		A+	A+	A+	A+	A+	A+	A+
Pdesignh	kW	3,8	3,8	6,1	6,1	7,2	10,5	11,8
Annual Power Consumption	kWh/annum	1330	1330	2135	2135	2520	3675	4130

Outdoor unit								
Type of fan	Type	Axial inverter						
Air flow rate	value	m³/h	2600	2600	3200	4000	4000	7200
Sound power	value	dB(A)	65,0	65,0	68,0	68,0	68,0	70,0
Sound pressure (5)	value	dB(A)	55,0	55,0	58,0	58,0	58,0	60,0
Type of compressor	Type	Rotary inverter						
Refrigerant:	Type	R32	R32	R32	R32	R32	R32	R32
Refrigerant load	kg	1,1	1,1	1,6	1,8	2,0	2,8	2,8
Global heating potential	GWP	675kgCO <sub>2</sub> eq						
CO <sub>2</sub> equivalent	t	0,71	0,71	1,08	1,22	1,35	1,86	1,86
Dimensions	mm	899X378X596	899X378X596	963X396X700	1001X427X790	1001X427X790	1098X440X1106	1098X440X1106

Electrical data								
Nominal input power (6)	kW	1,8	1,9	2,9	2,9	3,6	4,0	4,0
Nominal input power (6)	A	7,9	8,3	12,7	12,7	15,9	20,0	20,0
<b>Refrigeration Pipework</b>								
Diameter of liquid refrigerant connections	mm (inch)	6,35 (1/4")	6,35 (1/4")	6,35 (1/4")	6,35 (1/4")	6,35 (1/4")	6,35 (1/4")	6,35 (1/4")
Diameter of refrigerant gas conn	mm (inch)	9,52 (3/8")	9,52 (3/8")	9,52 (3/8")	9,52 (3/8")	9,52 (3/8")	9,52 (3/8")	9,52 (3/8")
Maximum refrigerant tube length	m	20	20	60	60	70	75	75
Maximum single cooling line length	m	10	10	20	20	20	25	25
Maximum cooling line level difference (indoor/indoor)	m	5,0	5,0	10,0	10,0	10,0	7,5	7,5
Maximum cooling line level difference (indoor/outdoor)	m	5,0	5,0	10,0	10,0	10,0	15,0	15,0
Refrigerant to be added	g/m							
Power supply		220-240V ~ 50Hz						

(1) Cooling (EN 14511 and EN 14825) room air temperature 27 °C d.b. / 19 °C w.b.; Outside air temperature 35 °C; turbo speed; cooling line length 5 m.

(2) EER/COP in accordance with the Standard (EN 14511), only declared for the purposes of the tax deductions in force at the time of this publication.

(3) Data in accordance with delegated regulation (EU) No. 626/2011.

(4) Heating (EN 14511 and EN 14825) Room air temperature 20 °C d.b.; Outside air temperature 7 °C d.b.; / 6 °C w.b.; turbo speed; cooling line length 5 m.

(5) Sound pressure measured in an anechoic chamber at a distance of 1.5m from the front of the unit.

(6) The nominal input power (nominal input current) is the maximum electrical input power (maximum input current) to the system, in accordance with standards EN 60335-1 and EN 60335-2-40. All the technical data refer to the respective combinations of indoor units permitted.



# MLG\_D


multisplit  
horizontal foldaway installation



- **X-FAN function**
- **Special coil with Blue Fin coating**

The units of the **MLG\_D** range are designed for horizontal indoor installation.

They have no casing, as they are intended to be inserted in wall niches. The air filter is easily accessible to enable regular cleaning.

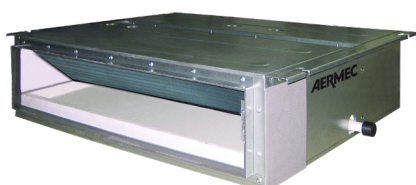

Indoor Unit		MLG250D	MLG350D	MLG500D	MLG600D	MLG700D
<b>Nominal performance in cooling mode</b>						
Cooling Capacity (1)	kW	2,50	3,50	5,00	6,00	7,10
Moisture removed	l/h	0,8	1,4	1,8	2,0	2,5
<b>Nominal performance in heating mode</b>						
Heating capacity (2)	kW	2,80	3,85	5,50	6,60	8,00
<b>Electrical data</b>						
Nominal input power (3)	W	75	85	110	110	110
<b>Refrigeration Pipework</b>						
Diameter of liquid refrigerant connections	mm (inch)	6,35 (1/4")	6,35 (1/4")	6,35 (1/4")	9,52 (3/8")	9,52 (3/8")
Diameter of refrigerant gas conn	mm (inch)	9,52 (3/8")	9,52 (3/8")	12,7 (1/2")	15,9 (5/8")	15,9 (5/8")
Condensate Discharge Diameter	mm	26,0	26,0	26,0	26,0	26,0
Power supply		220-240V ~ 50Hz				
Type of fan	type	Inverter centrifugal				
Air flow rate	min / max m <sup>3</sup> /h	280 / 450	300 / 550	500 / 700	550 / 1000	550 / 1000
Sound power	min / max dB(A)	41,0 / 47,0	42,0 / 49,0	43,0 / 51,0	44,0 / 52,0	44,0 / 52,0
Sound pressure (4)	min / max dB(A)	31,0 / 37,0	32,0 / 39,0	33,0 / 41,0	34,0 / 42,0	34,0 / 42,0

(1) Cooling (EN 14511 and EN 14825) room air temperature 27 °C d.b. / 19 °C w.b.; Outside air temperature 35 °C; turbo speed; cooling line length 5 m.

(2) Heating (EN 14511 and EN 14825) Room air temperature 20°C d.b.; Outside air temperature 7 °C d.b.; / 6 °C w.b.; turbo speed; cooling line length 5 m.

(3) The nominal input power (nominal input current) is the maximum electrical input power (maximum input current) to the system, in accordance with standards EN 60335-1 and EN 60335-2-40.

(4) Sound pressure measured in an anechoic chamber at a distance of 1.5m from the front of the unit.



# MLG\_CS / MLG\_C

multisplit  
installation in false ceilings



- **X-FAN function**
- **Special coil with Blue Fin coating**



The units of the **MLG\_CS** range are **cassette** type indoor units designed exclusively for installation in indoor false ceilings.

They are completed with the air delivery and intake grilles, which are essential for operation.

The grilles (mandatory accessory) are fitted with fins to spread the air in the room, with a suction grille with air filter and IR remote control receiver.

The air filter is easily accessible to enable regular cleaning.

Indoor Unit		MLG350CS	MLG500CS	MLG700C
<b>Nominal performance in cooling mode</b>				
Cooling Capacity (1)	kW	3,50	4,50	7,10
Moisture removed	l/h	1,4	1,8	2,5
<b>Nominal performance in heating mode</b>				
Heating capacity (2)	kW	4,00	5,00	8,00
<b>Electrical data</b>				
Nominal input power (3)	W	30	40	60
<b>Refrigeration Pipework</b>				
Diameter of liquid refrigerant connections	mm (inch)	6,35 (1/4")	6,35 (1/4")	9,52 (3/8")
Diameter of refrigerant gas conn	mm (inch)	9,52 (3/8")	12,7 (1/2")	15,9 (5/8")
Condensate Discharge Diameter	mm	25,0	25,0	25,0
Power supply		220-240V ~ 50Hz		
Type of fan	type	Inverter centrifugal		
Air flow rate	min / max m <sup>3</sup> /h	450 / 560	450 / 670	880 / 1220
Sound power	min / max dB(A)	45,0 / 52,0	46,0 / 56,0	47,0 / 56,0
Sound pressure (4)	min / max dB(A)	34,0 / 41,0	35,0 / 45,0	36,0 / 45,0

(1) Cooling (EN 14511 and EN 14825) room air temperature 27 °C d.b. / 19 °C w.b.; Outside air temperature 35 °C; turbo speed; cooling line length 5 m.

(2) Heating (EN 14511 and EN 14825) Room air temperature 20°C d.b.; Outside air temperature 7 °C d.b.; / 6 °C w.b.; turbo speed; cooling line length 5 m.

(3) The nominal input power (nominal input current) is the maximum electrical input power (maximum input current) to the system, in accordance with standards EN 60335-1 and EN 60335-2-40.

(4) Sound pressure measured in an anechoic chamber at a distance of 1.5m from the front of the unit.





# MLG\_F

multisplit  
floor or ceiling installation



- **New ecological refrigerant gas R32**
- **X-FAN function**
- **Special coil with Blue Fin coating**

The units of the **MLG\_F** range are **floor-ceiling** type indoor units designed for indoor installation on walls or ceilings.  
The air filter is easily accessible to enable regular cleaning.



Indoor Unit		MLG250F	MLG350F	MLG500F	MLG600F
<b>Nominal performance in cooling mode</b>					
Cooling Capacity (1)	kW	2.60	3.50	4.50	7.10
Moisture removed	l/h	0.8	1.4	1.8	2,5
<b>Nominal performance in heating mode</b>					
Heating capacity (2)	kW	2.70	4.00	5.00	8.00
<b>Electrical data</b>					
Nominal input power (3)	W	38	38	38	60
Type of fan	type	Inverter centrifugal			
Air flow rate	min / max m <sup>3</sup> /h	420 / 610	420 / 610	410 / 590	720 / 870
Sound power	min / max dB(A)	40,0 / 49,0	40,0 / 49,0	40,0 / 49,0	41,0 / 52,0
Sound pressure (4)	min / max dB(A)	26,0 / 35,0	26,0 / 35,0	26,0 / 35,0	27,0 / 35,0
<b>Refrigeration Pipework</b>					
Diameter of liquid refrigerant connections	mm (inch)	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")	9.52 (3/8")
Diameter of refrigerant gas conn	mm (inch)	9.52 (3/8")	12.7 (1/2")	12.7 (1/2")	15.9 (5/8")
Condensate Discharge Diameter	mm	17,0	17,0	17,0	17,0
Power supply	220-240V ~ 50Hz				

(1) Cooling (EN 14511 and EN 14825) room air temperature 27 °C d.b. / 19 °C w.b.; Outside air temperature 35 °C; turbo speed; cooling line length 5 m.

(2) Heating (EN 14511 and EN 14825) Room air temperature 20°C d.b.; Outside air temperature 7 °C d.b.; / 6 °C w.b.; turbo speed; cooling line length 5 m.

(3) The nominal input power (nominal input current) is the maximum electrical input power (maximum input current) to the system, in accordance with standards EN 60335-1 and EN 60335-2-40.

(4) Sound pressure measured in an anechoic chamber at a distance of 1.5m from the front of the unit.



# MLG\_FS

multisplit  
wall-mounted installation



- **Air purifier (Cold Plasma)**
- **Wi-Fi module as standard**
- **X-FAN function**

The units of the **MLG\_FS** range are **console** type indoor units designed for indoor wall installation.  
The air filter is easily accessible to enable regular cleaning.



Indoor Unit		MLG500FS
Nominal performance in cooling mode		
Cooling Capacity (1)	kW	5.20
Moisture removed	l/h	3.8
Nominal performance in heating mode		
Heating capacity (2)	kW	5.33
Electrical data		
Nominal input power (3)	W	50
Type of fan	type	Inverter centrifugal
Air flow rate	min / max m <sup>3</sup> /h	320 / 650
Sound power	min / max dB(A)	45,0 / 55,0
Sound pressure (4)	min / max dB(A)	35,0 / 45,0
Refrigeration Pipework		
Diameter of liquid refrigerant connections	mm (inch)	6.35 (1/4")
Diameter of refrigerant gas conn	mm (inch)	12.7 (1/2")
Condensate Discharge Diameter	mm	28.0
Power supply		220-240V ~ 50Hz

(1) Cooling (EN 14511 and EN 14825) room air temperature 27 °C d.b. / 19 °C w.b.; Outside air temperature 35 °C; turbo speed; cooling line length 5 m.

(2) Heating (EN 14511 and EN 14825) Room air temperature 20°C d.b.; Outside air temperature 7 °C d.b.; / 6 °C w.b.; turbo speed; cooling line length 5 m.

(3) The nominal input power (nominal input current) is the maximum electrical input power (maximum input current) to the system, in accordance with standards EN 60335-1 and EN 60335-2-40.

(4) Sound pressure measured in an anechoic chamber at a distance of 1.5m from the front of the unit.



# SLG\_W

universal  
wall-mounted installation



- **New ecological refrigerant gas R32**
- **Possibility of Wi-Fi control, using the accessory**
- **X-FAN function**

The units of the **SLG\_W** range are **wall** type indoor units designed for indoor wall installation.

**Universal indoor units:** some indoor units can be combined with both outdoor monosplit units of the SLG range and outdoor multisplit units of the MLG range.



SLG	200W	250W	350W	500W	700W
Universal indoor units compatible with MLG multisplit system		•	•	•	•
Multisplit indoor units	•				

Indoor Unit		SLG200W	SLG250W	SLG350W	SLG500W	SLG700W
<b>Nominal performance in cooling mode</b>						
Cooling Capacity (1)	kW	2,10	2,70	3,20	4,60	6,16
Moisture removed	l/h	0,6	0,8	1,4	1,8	1,8
<b>Nominal performance in heating mode</b>						
Heating capacity (2)	kW	2,60	2,80	3,50	5,20	6,45
<b>Electrical data</b>						
Nominal input power (3)	W	35	35	35	55	55
<b>Refrigeration Pipework</b>						
Diameter of liquid refrigerant connections	mm (inch)	6,35 (1/4")	6,35 (1/4")	6,35 (1/4")	6,35 (1/4")	6,35 (1/4")
Diameter of refrigerant gas conn	mm (inch)	9,52 (3/8")	9,52 (3/8")	9,52 (3/8")	9,52 (3/8")	15,9 (5/8")
Condensate Discharge Diameter	mm	16,0	16,0	16,0	16,0	16,0
Power supply		220-240V ~ 50Hz				

(1) Cooling (EN 14511 and EN 14825) room air temperature 27 °C d.b. / 19 °C w.b.; Outside air temperature 35 °C; turbo speed; cooling line length 5 m.

(2) Heating (EN 14511 and EN 14825) Room air temperature 20°C d.b.; Outside air temperature 7 °C d.b.; / 6 °C w.b.; turbo speed; cooling line length 5 m.

(3) The nominal input power (nominal input current) is the maximum electrical input power (maximum input current) to the system, in accordance with standards EN 60335-1 and EN 60335-2-40.

(4) Sound pressure measured in an anechoic chamber at a distance of 1.5m from the front of the unit.





# SMG\_W

universal  
wall-mounted installation



- **Air purifier (Cold Plasma)**
- **Wi-Fi module as standard**
- **Innovative design with elegant curved lines**



The units of the **SMG\_W** range are **wall** type indoor units designed for indoor wall installation.

SMG has a refined, streamlined design. Its curved lines create a structure with an innovative yet practical style.

**Universal indoor units:** all the indoor units can be combined with both outdoor monosplit units of the SMG range and outdoor multisplit units of the MLG range.

Indoor Unit			SMG270W	SMG350W
Nominal performance in cooling mode				
Cooling Capacity (1)	kW		2,70	3,53
Moisture removed	l/h		0,8	0,8
Nominal performance in heating mode				
Heating capacity (2)	kW		3,20	4,00
Electrical data				
Nominal input power (3)	kW		2.3	2.4
Type of fan	type		Tangential inverter	
Air flow rate	min / max	m <sup>3</sup> /h	250 / 450	250 / 500
Sound power	min / max	dB(A)	37,0 / 50,0	37,0 / 51,0
Sound pressure (4)	min / max	dB(A)	23,0 / 36,0	23,0 / 37,0
Refrigeration Pipework				
Diameter of liquid refrigerant connections	mm (inch)		6,35 (1/4")	6,35 (1/4")
Diameter of refrigerant gas conn	mm (inch)		9,52 (3/8")	9,52 (3/8")
Power supply			220-240V ~ 50Hz	

(1) Cooling (EN 14511 and EN 14825) room air temperature 27 °C d.b. / 19 °C w.b.; Outside air temperature 35 °C; turbo speed; cooling line length 5 m.

(2) Heating (EN 14511 and EN 14825) Room air temperature 20°C d.b.; Outside air temperature 7 °C d.b.; / 6 °C w.b.; turbo speed; cooling line length 5 m.

(3) The nominal input power (nominal input current) is the maximum electrical input power (maximum input current) to the system, in accordance with standards EN 60335-1 and EN 60335-2-40.

(4) Sound pressure measured in an anechoic chamber at a distance of 1.5m from the front of the unit.



# CKG\_FS

universal  
wall-mounted installation



- **New ecological refrigerant gas R32**
- **Air purifier (Cold Plasma)**
- **Wi-Fi module as standard**

The units of the **CKG\_FS** range are **console** type indoor units designed for indoor wall installation.

**Universal indoor units:** some indoor units can be combined with both outdoor monosplit units of the CKG range and outdoor multisplit units of the MLG range:



CKG	260FS	360FS	500FS
Universal indoor units compatible with MLG multisplit system	•	•	

Indoor Unit		CKG260FS	CKG360FS
Nominal performance in cooling mode			
Cooling Capacity (1)	kW	2,70	3,52
Moisture removed	l/h	0,8	1,2
Nominal performance in heating mode			
Heating capacity (2)	kW	2,90	3,80
Electrical data			
Nominal input power (3)	W	35	40
Type of fan	type	Inverter centrifugal	
Air flow rate	min / max m <sup>3</sup> /h	280 / 430	360 / 520
Sound power	min / max dB(A)	38,0 / 48,0	39,0 / 50,0
Sound pressure (4)	min / max dB(A)	26,0 / 36,0	29,0 / 40,0
Refrigeration Pipework			
Diameter of liquid refrigerant connections	mm (inch)	6,35 (1/4")	6,35 (1/4")
Diameter of refrigerant gas conn	mm (inch)	9,52 (3/8")	9,52 (3/8")
Condensate Discharge Diameter	mm	17,0	17,0
Power supply		220-240V ~ 50Hz	

(1) Cooling (EN 14511 and EN 14825) room air temperature 27 °C d.b. / 19 °C w.b.; Outside air temperature 35 °C; turbo speed; cooling line length 5 m.

(2) Heating (EN 14511 and EN 14825) Room air temperature 20°C d.b.; Outside air temperature 7 °C d.b.; / 6 °C w.b.; turbo speed; cooling line length 5 m.

(3) The nominal input power (nominal input current) is the maximum electrical input power (maximum input current) to the system, in accordance with standards EN 60335-1 and EN 60335-2-40.

(4) Sound pressure measured in an anechoic chamber at a distance of 1.5m from the front of the unit.







# Allowed combinations of indoor units

For the MLG trialsplit, quadrisplit and pentasplit units, it is mandatory to install at least 2 indoor units for correct functioning of the system.

For further information, please refer to the technical documentation on the website [www.aermec.com](http://www.aermec.com)

MLG420 (14kBtu/h)		MLG520 (18kBtu/h)		MLG630 (21kBtu/h)		MLG730 (24kBtu/h)		MLG840 (28kBtu/h)		
No. of indoor units										
1	2	1	2	2	3	2	3	2	3	4
7	7+7	9	7+7	7+7	7+7+7	7+7	7+7+7	7+7	7+7+7	7+7+7+7
9	7+9	12	7+9	7+9	7+7+9	7+9	7+7+9	7+9	7+7+9	7+7+7+9
12	7+12		7+12	7+12	7+7+12	7+12	7+7+12	7+12	7+7+12	7+7+7+12
	9+9		9+9	7+18	7+9+9	7+18	7+7+18	7+18	7+7+18	7+7+7+18
	9+12		9+12	9+9	7+9+12	9+9	7+9+9	9+9	7+9+9	7+7+9+9
			12+12	9+12	7+12+12	9+12	7+9+12	9+12	7+9+12	7+7+9+12
				9+18	9+9+9	9+18	7+9+18	9+18	7+9+18	7+7+9+18
				12+12	9+9+12	12+12	7+12+12	12+12	7+12+12	7+7+12+12
				12+18		12+18	9+9+9	12+18	7+12+18	7+9+9+9
						18+18	9+9+12	18+18	9+9+9	7+9+9+12
							9+9+18		9+9+12	7+9+12+12
							9+12+12		9+9+18	9+9+9+9
							12+12+12		9+12+12	9+9+9+12
									9+12+18	9+9+12+12
									12+12+12	
									12+12+18	

Reference combinations



MLG1040 (36kBtu/h)			MLG1250 (42kBtu/h)			
No. of indoor units						
2	3	4	2	3	4	5
7+12	7+7+7	7+7+7+7	7+18	7+7+7	7+7+7+7	7+7+7+7+7
7+18	7+7+9	7+7+7+9	7+21	7+7+9	7+7+7+9	7+7+7+7+9
7+21	7+7+12	7+7+7+12	7+24	7+7+12	7+7+7+12	7+7+7+7+12
7+24	7+7+18	7+7+7+18	9+12	7+7+18	7+7+7+18	7+7+7+7+18
9+9	7+7+21	7+7+7+21	9+18	7+7+21	7+7+7+21	7+7+7+7+21
9+12	7+7+24	7+7+7+24	9+21	7+7+24	7+7+7+24	7+7+7+7+24
9+18	7+9+9	7+7+9+9	9+24	7+9+9	7+7+9+9	7+7+7+9+9
9+21	7+9+12	7+7+9+12	12+12	7+9+12	7+7+9+12	7+7+7+9+12
9+24	7+9+18	7+7+9+18	12+18	7+9+18	7+7+9+18	7+7+7+9+18
12+12	7+9+21	7+7+9+21	12+21	7+9+21	7+7+9+21	7+7+7+9+21
12+18	7+9+24	7+7+9+24	12+24	7+9+24	7+7+9+24	7+7+7+9+24
12+21	7+12+12	7+7+12+12	18+18	7+12+12	7+7+12+12	7+7+7+12+12
12+24	7+12+18	7+7+12+18	18+21	7+12+18	7+7+12+18	7+7+7+12+18
18+18	7+12+21	7+7+12+21	18+24	7+12+21	7+7+12+21	7+7+7+12+21
18+21	7+12+24	7+7+12+24	21+21	7+12+24	7+7+12+24	7+7+7+12+24
18+24	7+18+18	7+7+18+18	21+24	7+18+18	7+7+18+18	7+7+7+18+18
21+21	7+18+21	7+7+18+21	24+24	7+18+21	7+7+18+21	7+7+7+18+21
21+24	7+18+24	7+9+9+9		7+18+24	7+7+18+24	7+7+7+18+24
24+24	7+21+21	7+9+9+12		7+21+21	7+7+21+21	7+7+7+21+21
	7+21+24	7+9+9+18		7+21+24	7+7+21+24	7+7+7+21+24
	9+9+9	7+9+9+21		7+24+24	7+7+24+24	7+7+9+9+12
	9+9+12	7+9+9+24		9+9+9	7+9+9+9	7+7+9+9+18
	9+9+18	7+9+12+12		9+9+12	7+9+9+12	7+7+9+9+21
	9+9+21	7+9+12+18		9+9+18	7+9+9+18	7+7+9+9+24
	9+9+24	7+9+12+21		9+9+21	7+9+9+21	7+7+9+12+12
	9+12+12	7+9+12+24		9+9+24	7+9+9+24	7+7+9+12+18
	9+12+18	7+9+18+18		9+12+12	7+9+12+12	7+7+9+12+21
	9+12+21	7+12+12+12		9+12+18	7+9+12+18	7+7+9+12+24
	9+12+24	7+12+12+18		9+12+21	7+9+12+21	7+7+9+18+18
	9+18+18	7+12+12+21		9+12+24	7+9+12+24	7+7+9+18+21
	9+18+21	9+9+9+9		9+18+18	7+9+18+18	7+7+12+12+12
	9+18+24	9+9+9+12		9+18+21	7+9+18+21	7+7+12+12+18
	9+21+21	9+9+9+18		9+18+24	7+9+18+24	7+7+12+12+21
	9+21+24	9+9+9+21		9+21+21	7+9+21+21	7+7+12+12+24
	12+12+12	9+9+9+24		9+21+24	7+9+21+24	7+7+12+18+18
	12+12+18	9+9+12+12		9+24+24	7+12+12+12	7+9+9+9+9
	12+12+21	9+9+12+18		12+12+12	7+12+12+18	7+9+9+9+12
	12+12+24	9+9+12+21		12+12+18	7+12+12+21	7+9+9+9+18
	12+18+18	9+9+12+24		12+12+21	7+12+12+24	7+9+9+9+21
	12+18+21	9+9+18+18		12+12+24	7+12+18+18	7+9+9+9+24
	12+18+24	9+12+12+12		12+18+18	7+12+18+21	7+9+9+12+12
	12+21+21	9+12+12+18		12+18+21	7+12+18+24	7+9+9+12+18
	18+18+18	9+12+12+21		12+18+24	7+12+21+21	7+9+9+12+21
		12+12+12+12		12+21+21	7+18+18+18	7+9+9+12+24
		12+12+12+18		12+21+24	9+9+9+9	7+9+9+18+18
				12+24+24	9+9+9+12	7+9+12+12+12
				18+18+18	9+9+9+18	7+9+12+12+18
				18+18+21	9+9+9+21	7+9+12+12+21
				18+18+24	9+9+9+24	7+12+12+12+12
				18+21+21	9+9+12+12	7+12+12+12+18
				18+21+24	9+9+12+18	9+9+9+9+9
				21+21+21	9+9+12+21	9+9+9+9+12
					9+9+12+24	9+9+9+9+18
					9+9+18+18	9+9+9+9+21
					9+9+18+21	9+9+9+9+24
					9+9+18+24	9+9+9+12+12
					9+9+21+21	9+9+9+12+18
					9+9+21+24	9+9+9+12+21
					9+12+12+12	9+9+9+12+24
					9+12+12+18	9+9+9+18+18
					9+12+12+21	9+9+12+12+12
					9+12+12+24	9+9+12+12+18
					9+12+18+18	9+9+12+12+21
					9+12+18+21	9+12+12+12+12
					9+12+18+24	9+12+12+12+18
					9+12+21+21	12+12+12+12+12
					9+18+18+18	
					12+12+12+12	
					12+12+12+18	
					12+12+12+21	
					12+12+12+24	
					12+12+18+18	
					12+12+18+21	











# MPG

multisplit

## ACCESSORIES\*

**WRCB:** Wired panel with liquid crystal display and soft-touch buttons, equipped with an integrated wi-fi module.

**WRCA:** wired panel with liquid crystal display and soft-touch buttons.

**CC2:** centralised control (7" touchscreen display).

**WIFIKIT:** Plug & Play module to be installed in the indoor unit for Wi-Fi control.

**DCK:** remote contact kit.

**GLG40S:** air delivery and intake grille measuring 620x620 mm for cassette-type indoor units.

**GLG40:** air delivery and intake grille measuring 950x950 mm for cassette-type indoor units.

\* For more information about the accessories and their compatibility, refer to the product data sheet and the specific documentation of the accessory itself.

Outdoor unit			MPG420	MLPG520	MPG630	MPG730	MPG840
<b>Nominal performance in cooling mode</b>							
Cooling Capacity (1)		kW	4,10	5,30	6,10	7,10	8,00
Total input power (cooling) (1)		kW	1,10	1,48	1,48	1,88	2,12
EER (2)		W/W	3,73	3,58	4,12	3,78	3,77
<b>Minimum and maximum cooling performance</b>							
Cooling capacity:	min / max	kW	2,05 / 5,00	2,14 / 5,80	2,20 / 8,30	2,30 / 9,20	2,30 / 11,00
Input power (cooling)	min / max	kW	0,20 / 2,20	0,30 / 2,50	0,40 / 2,90	0,60 / 3,40	0,80 / 3,60
<b>Seasonal efficiency</b>							
SEER		W/W	6,70	6,50	6,90	6,50	6,10
Energy efficiency class (3)			A++	A++	A++	A++	A++
Annual Power Consumption		kWh/annum	214	285	309	382	459
<b>Nominal performance in heating mode</b>							
Heating capacity (4)		kW	4,40	5,65	6,50	8,60	9,50
Total input power (heating) (4)		kW	0,97	1,25	1,43	2,23	2,20
COP (2)		W/W	4,54	4,52	4,55	3,86	4,32
<b>Minimum and maximum heating performance</b>							
Heating capacity	min / max	kW	2,49 / 5,40	2,58 / 6,50	3,60 / 8,50	3,65 / 9,20	3,65 / 10,25
Input power (heating mode)	min / max	kW	0,30 / 2,25	0,40 / 2,50	0,40 / 2,90	0,60 / 3,00	0,70 / 3,60
<b>Seasonal efficiency (temperate climate)</b>							
SCOP			4,00	4,00	3,80	3,80	4,00
Energy efficiency class (3)			A+	A+	A	A	A+
Annual Power Consumption		kWh/annum	1295	1435	2247	2247	2345
<b>Outdoor unit</b>							
Type of fan		Type	Axial inverter				
Air flow rate	max	m <sup>3</sup> /h	2300	2300	3800	3800	3800
Sound power	max	dB(A)	62,0	64,0	68,0	68,0	68,0
Sound pressure (1 m) (5)	max	dB(A)	52,0	54,0	58,0	58,0	58,0
Type of compressor		Type	Rotary inverter				
Refrigerant:		Type	R32	R32	R32	R32	R32
Refrigerant load		kg	0,75	0,90	1,60	1,70	1,80
Global heating potential		GWP	675kgCO <sub>2</sub> eq				
CO <sub>2</sub> equivalent		t	0,51	0,61	1,08	1,15	1,22
Dimensions		mm	822x352x555	822x352x555	964x402x660	964x402x660	964x402x660
<b>Electrical data</b>							
Nominal input power (6)		kW	2,3	2,5	2,9	3,4	3,6
Nominal input power (6)		A	10,0	11,0	12,9	15,0	16,0
<b>Refrigeration Pipework</b>							
Diameter of liquid refrigerant connections		mm (inch)	6,35 (1/4")	6,35 (1/4")	6,35 (1/4")	6,35 (1/4")	6,35 (1/4")
Diameter of refrigerant gas conn		mm (inch)	9,52 (3/8")	9,52 (3/8")	9,52 (3/8")	9,52 (3/8")	9,52 (3/8")
Maximum refrigerant tube length		m	40	40	60	60	70
Maximum single cooling line length		m	20	20	20	20	20
Maximum cooling line level difference (indoor/indoor)		m	15	15	15	15	15
Maximum cooling line level difference (indoor/outdoor)		m	15	15	15	15	15
Refrigerant to be added		g/m	20	20	20	20	20
Power supply			220-240V ~ 50Hz				

(1) Cooling (EN 14511 and EN 14825) room air temperature 27 °C d.b. / 19 °C w.b.; Outside air temperature 35 °C; turbo speed; cooling line length 5 m.

(2) EER/COP in accordance with the Standard (EN 14511), only declared for the purposes of the tax deductions in force at the time of this publication.

(3) Data in accordance with delegated regulation (EU) No. 626/2011.

(4) Heating (EN 14511 and EN 14825) Room air temperature 20 °C d.b.; Outside air temperature 7 °C d.b.; / 6 °C w.b.; turbo speed; cooling line length 5 m.

(5) Sound pressure measured in a semi-anechoic chamber at a distance of 1m from the front of the unit.

(6) The nominal input power (nominal input current) is the maximum electrical input power (maximum input current) to the system, in accordance with standards EN 60335-1 and EN 60335-2-40.  
All the technical data refer to the respective combinations of indoor units permitted.





# SPG\_W

universal  
wall-mounted installation



- **X-FAN function**
- **Possibility of Wi-Fi control, using the accessory**
- **Special coil with Blue Fin coating**



The units of the **SPG\_W** range are **wall** type indoor units designed for indoor wall installation.

**Universal indoor units:** all of the indoor units can be combined with both outdoor monosplit units of the SPG range and outdoor multisplit units of the MPG range.

SPG	200W	250W	350W	500W	700W
Universal indoor units compatible with MPG multisplit system		•	•	•	•
Multisplit indoor units	•				

Indoor Unit		SPG200W	SPG250W	SPG350W	SPG500W	SPG700W
<b>Nominal performance in cooling mode</b>						
Cooling Capacity (1)	kW	2,20	2,50	3,20	4,60	6,20
Moisture removed	l/h	0,6	0,6	1,4	1,8	1,8
<b>Nominal performance in heating mode</b>						
Heating capacity (2)	kW	2,40	2,80	3,40	5,20	6,50
<b>Electrical data</b>						
Nominal input power (3)	W	13	13	23	38	38
Type of fan	type	Inverter centrifugal				
Air flow rate	min / max m <sup>3</sup> /h	250 / 470	270 / 470	320 / 520	600 / 800	650 / 950
Sound power	min / max dB(A)	34,0 / 49,0	34,0 / 48,0	38,0 / 49,0	44,0 / 52,0	49,0 / 58,0
Sound pressure (4)	min / max dB(A)	22,0 / 36,0	22,0 / 36,0	26,0 / 37,0	34,0 / 42,0	35,0 / 44,0
<b>Refrigeration Pipework</b>						
Diameter of liquid refrigerant connections	mm (inch)	6,35 (1/4")	6,35 (1/4")	6,35 (1/4")	6,35 (1/4")	6,35 (1/4")
Diameter of refrigerant gas conn	mm (inch)	9,52 (3/8")	9,52 (3/8")	9,52 (3/8")	9,52 (3/8")	12,7 (1/2")
Condensate Discharge Diameter	mm	16,0	16,0	16,0	16,0	16,0
Power supply		220-240V ~ 50Hz				

(1) Cooling (EN 14511 and EN 14825) room air temperature 27 °C d.b. / 19 °C w.b.; Outside air temperature 35 °C; turbo speed; cooling line length 5 m.

(2) Heating (EN 14511 and EN 14825) Room air temperature 20 °C d.b.; Outside air temperature 7 °C d.b.; / 6 °C w.b.; turbo speed; cooling line length 5 m.

(3) The nominal input power (nominal input current) is the maximum electrical input power (maximum input current) to the system, in accordance with standards EN 60335-1 and EN 60335-2-40.

(4) Sound pressure measured in a semi-anechoic chamber at a distance of 1m from the front of the unit.

Sound power calculated in free field, in accordance with UNI EN ISO 3744.



# SMG\_W

universal  
wall-mounted installation



- **Air purifier (Cold Plasma)**
- **Wi-Fi module as standard**
- **Innovative design with elegant curved lines**



The units of the **SMG\_W** range are **wall** type indoor units designed for indoor wall installation.

SMG has a refined, streamlined design. Its curved lines create a structure with an innovative yet practical style.

**Universal indoor units:** all the indoor units can be combined with both outdoor monosplit units of the SMG range and outdoor multisplit units of the MPG range.

Indoor Unit			SMG270W	SMG350W
Nominal performance in cooling mode				
Cooling Capacity (1)		kW	2,70	3,53
Moisture removed		l/h	0,8	0,8
Nominal performance in heating mode				
Heating capacity (2)		kW	3,20	4,00
Electrical data				
Nominal input power (3)		kW	2.3	2.4
Type of fan		type	Tangential inverter	
Air flow rate	min / max	m³/h	250 / 450	250 / 500
Sound power	min / max	dB(A)	37,0 / 50,0	37,0 / 51,0
Sound pressure (4)	min / max	dB(A)	23,0 / 36,0	23,0 / 37,0
Refrigeration Pipework				
Diameter of liquid refrigerant connections		mm (inch)	6,35 (1/4")	6,35 (1/4")
Diameter of refrigerant gas conn		mm (inch)	9,52 (3/8")	9,52 (3/8")
Condensate Discharge Diameter		mm	-	-
Power supply			220-240V ~ 50Hz	

(1) Cooling (EN 14511 and EN 14825) room air temperature 27 °C d.b. / 19 °C w.b.; Outside air temperature 35 °C; turbo speed; cooling line length 5 m.

(2) Heating (EN 14511 and EN 14825) Room air temperature 20 °C d.b.; Outside air temperature 7 °C d.b.; / 6 °C w.b.; turbo speed; cooling line length 5 m.

(3) The nominal input power (nominal input current) is the maximum electrical input power (maximum input current) to the system, in accordance with standards EN 60335-1 and EN 60335-2-40.

(4) Sound pressure measured in an anechoic chamber at a distance of 1.5m from the front of the unit.



# CKG\_FS

universal  
wall-mounted installation



- **New ecological refrigerant gas R32**
- **Air purifier (Cold Plasma)**
- **Wi-Fi module as standard**

The units of the **CKG\_FS** range are **console** type indoor units designed for indoor wall installation.

They have a twin-delivery inverter fan unit for optimum air flow control. **Universal indoor units:** all indoor units can be combined with both multisplit outdoor units of the CKG range and outdoor multisplit units of the MPG range.



Indoor Unit		CKG260FS	CKG360FS	CKG500FS
<b>Nominal performance in cooling mode</b>				
Cooling Capacity (1)	kW	2,70	3,52	5,20
Moisture removed	l/h	0,8	1,2	1,8
<b>Nominal performance in heating mode</b>				
Heating capacity (2)	kW	2,90	3,80	5,33
<b>Electrical data</b>				
Nominal input power (3)	W	35	40	50
<b>Refrigeration Pipework</b>				
Diameter of liquid refrigerant connections	mm (inch)	6,35 (1/4")	6,35 (1/4")	6,35 (1/4")
Diameter of refrigerant gas conn	mm (inch)	9,52 (3/8")	9,52 (3/8")	12,7 (1/2")
Condensate Discharge Diameter	mm	17,0	17,0	17,0
Power supply		220-240V ~ 50Hz		
Type of fan	type	Inverter centrifugal		
Air flow rate	min / max m³/h	280 / 430	360 / 520	410 / 650
Sound power	min / max dB(A)	38,0 / 48,0	39,0 / 50,0	47,0 / 55,0
Sound pressure (4)	min / max dB(A)	26,0 / 36,0	29,0 / 40,0	37,0 / 45,0

(1) Cooling (EN 14511 and EN 14825) room air temperature 27 °C d.b. / 19 °C w.b.; Outside air temperature 35 °C; turbo speed; cooling line length 5 m.

(2) Heating (EN 14511 and EN 14825) Room air temperature 20°C d.b.; Outside air temperature 7 °C d.b.; / 6 °C w.b.; turbo speed; cooling line length 5 m.

(3) The nominal input power (nominal input current) is the maximum electrical input power (maximum input current) to the system, in accordance with standards EN 60335-1 and EN 60335-2-40.

(4) Sound pressure measured in an anechoic chamber at a distance of 1.5m from the front of the unit.





# MLG\_F

multisplit  
floor or ceiling installation



- **New ecological refrigerant gas R32**
- **X-FAN function**
- **Special coil with Blue Fin coating**

The units of the **MLG\_F** range are **floor-ceiling** type indoor units designed for indoor installation on walls or ceilings. The air filter is easily accessible to enable regular cleaning.



Indoor Unit		MLG250F	MLG350F	MLG500F	MLG600F
<b>Nominal performance in cooling mode</b>					
Cooling Capacity (1)	kW	2.60	3.50	4.50	7.10
Moisture removed	l/h	0.8	1.4	1.8	2,5
<b>Nominal performance in heating mode</b>					
Heating capacity (2)	kW	2.70	4.00	5.00	8.00
<b>Electrical data</b>					
Nominal input power (3)	W	38	38	38	60
Type of fan	type	Inverter centrifugal			
Air flow rate	min / max m <sup>3</sup> /h	420 / 610	420 / 610	410 / 590	720 / 870
Sound power	min / max dB(A)	40,0 / 49,0	40,0 / 49,0	40,0 / 49,0	41,0 / 52,0
Sound pressure (4)	min / max dB(A)	26,0 / 35,0	26,0 / 35,0	26,0 / 35,0	27,0 / 35,0
<b>Refrigeration Pipework</b>					
Diameter of liquid refrigerant connections	mm (inch)	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")	9.52 (3/8")
Diameter of refrigerant gas conn	mm (inch)	9.52 (3/8")	12.7 (1/2")	12.7 (1/2")	15.9 (5/8")
Condensate Discharge Diameter	mm	17,0	17,0	17,0	17,0
Power supply	220-240V ~ 50Hz				

(1) Cooling (EN 14511 and EN 14825) room air temperature 27 °C d.b. / 19 °C w.b.; Outside air temperature 35 °C; turbo speed; cooling line length 5 m.

(2) Heating (EN 14511 and EN 14825) Room air temperature 20°C d.b.; Outside air temperature 7 °C d.b.; / 6 °C w.b.; turbo speed; cooling line length 5 m.

(3) The nominal input power (nominal input current) is the maximum electrical input power (maximum input current) to the system, in accordance with standards EN 60335-1 and EN 60335-2-40.

(4) Sound pressure measured in an anechoic chamber at a distance of 1.5m from the front of the unit.



# MPG\_CS / MPG\_C

multisplit  
installation in false ceilings



- New ecological refrigerant gas R32
- Special coil with Blue Fin coating



The units of the **MPG\_CS** and **MPG\_C** range are **8-way-cassette** type indoor units designed exclusively for installation in indoor false ceilings. They are completed with the air delivery and intake grilles, which are essential for operation.

The grilles (mandatory accessory) are fitted with fins to spread the air in the room, with a suction grille with air filter and IR remote control receiver.

The air filter is easily accessible to enable regular cleaning.

Indoor Unit		MPG350CS	MPG500CS	MPG700C
<b>Nominal performance in cooling mode</b>				
Cooling Capacity (1)	kW	3,50	5,00	7,00
Moisture removed	l/h	1,4	1,8	2,5
<b>Nominal performance in heating mode</b>				
Heating capacity (2)	kW	4,00	5,50	8,00
<b>Electrical data</b>				
Nominal input power (3)	W	30	35	50
<b>Refrigeration Pipework</b>				
Diameter of liquid refrigerant connections	mm (inch)	6,35 (1/4")	6,35 (1/4")	9,52 (3/8")
Diameter of refrigerant gas conn	mm (inch)	9,52 (3/8")	12,7 (1/2")	15,9 (5/8")
Condensate Discharge Diameter	mm	25,0	25,0	25,0
Power supply		220-240V ~ 50Hz		
Type of fan	type	Inverter centrifugal		
Air flow rate	min / max m <sup>3</sup> /h	380 / 540	380 / 540	830 / 1050
Sound power	min / max dB(A)	46,0 / 55,0	46,0 / 55,0	57,0 / 61,0
Sound pressure (4)	min / max dB(A)	39,0 / 30,0	39,0 / 30,0	43,0 / 38,0

(1) Cooling (EN 14511 and EN 14825) room air temperature 27 °C d.b. / 19 °C w.b.; Outside air temperature 35 °C; turbo speed; cooling line length 5 m.

(2) Heating (EN 14511 and EN 14825) Room air temperature 20°C d.b.; Outside air temperature 7 °C d.b.; / 6 °C w.b.; turbo speed; cooling line length 5 m.

(3) The nominal input power (nominal input current) is the maximum electrical input power (maximum input current) to the system, in accordance with standards EN 60335-1 and EN 60335-2-40.

(4) Sound pressure measured in a semi-anechoic chamber at a distance of 1m from the front of the unit.





# MPG\_D


multisplit  
duct type horizontal installation



- **New ecological refrigerant gas R32**
- **X-FAN function**

The units of the **MPG\_D** range are designed for indoor duct type horizontal installation.

They have no casing, as they are intended to be inserted in wall niches. The air filter is easily accessible to enable regular cleaning.

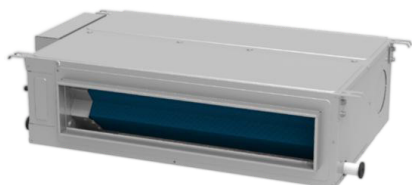

Indoor Unit		MPG250D	MPG350D	MPG500D	MPG700D
<b>Nominal performance in cooling mode</b>					
Cooling Capacity (1)	kW	2,65	3,50	5,00	7,00
Moisture removed	l/h	0,8	1,4	1,8	2,5
<b>Nominal performance in heating mode</b>					
Heating capacity (2)	kW	2,80	4,00	5,50	8,00
<b>Electrical data</b>					
Nominal input power (3)	W	70	80	80	200
Type of fan	type	Inverter centrifugal			
Air flow rate	min / max m <sup>3</sup> /h	220 / 450	300 / 540	420 / 720	900 / 1200
Sound power	min / max dB(A)	37,0 / 43,0	42,0 / 49,0	40,0 / 46,0	51,0 / 57,0
Sound pressure (4)	min / max dB(A)	22,0 / 28,0	27,0 / 34,0	25,0 / 31,0	36,0 / 42,0
<b>Refrigeration Pipework</b>					
Diameter of liquid refrigerant connections	mm (inch)	6,35 (1/4")	6,35 (1/4")	6,35 (1/4")	6,35 (1/4")
Diameter of refrigerant gas conn	mm (inch)	9,52 (3/8")	9,52 (3/8")	12,7 (1/2")	15,9 (5/8")
Condensate Discharge Diameter	mm	26,0	26,0	26,0	26,0
Power supply		220-240V ~ 50Hz			

(1) Cooling (EN 14511 and EN 14825) room air temperature 27 °C d.b. / 19 °C w.b.; Outside air temperature 35 °C; turbo speed; cooling line length 5 m.

(2) Heating (EN 14511 and EN 14825) Room air temperature 20°C d.b.; Outside air temperature 7 °C d.b.; / 6 °C w.b.; turbo speed; cooling line length 5 m.

(3) The nominal input power (nominal input current) is the maximum electrical input power (maximum input current) to the system, in accordance with standards EN 60335-1 and EN 60335-2-40.

(4) Sound pressure measured in a semi-anechoic chamber at a distance of 1m from the front of the unit.





# MPG\_DH


multisplit  
duct type horizontal installation



- **New ecological refrigerant gas R32**
- **X-FAN function**

The units of the **MPG\_DH** range are designed for indoor duct type horizontal installation.

They have no casing, as they are intended to be inserted in wall niches. The air filter is easily accessible to enable regular cleaning.

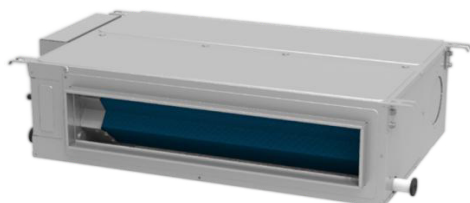

Indoor Unit		MPG250DH	MPG350DH	MPG500DH	MPG700DH
<b>Nominal performance in cooling mode</b>					
Cooling Capacity (1)	kW	2,65	3,50	5,00	7,00
Moisture removed	l/h	0,8	1,4	1,8	2,5
<b>Nominal performance in heating mode</b>					
Heating capacity (2)	kW	2,80	4,00	5,50	8,00
<b>Electrical data</b>					
Nominal input power (3)	W	50	50	75	80
High static pressure	max Pa	60	60	60	125
Type of fan	type	Inverter centrifugal			
Air flow rate	min / max m³/h	550 / 670	410 / 560	750 / 840	900 / 1200
Sound power	min / max dB(A)	51,0 / 55,0	49,0 / 53,0	53,0 / 55,0	53,0 / 57,0
Sound pressure (4)	min / max dB(A)	35,0 / 39,0	33,0 / 37,0	37,0 / 39,0	36,0 / 40,0
<b>Refrigeration Pipework</b>					
Diameter of liquid refrigerant connections	mm (inch)	6,35 (1/4")	6,35 (1/4")	6,35 (1/4")	6,35 (1/4")
Diameter of refrigerant gas conn	mm (inch)	9,52 (3/8")	9,52 (3/8")	12,7 (1/2")	15,9 (5/8")
Condensate Discharge Diameter	mm	26,0	26,0	26,0	26,0
Power supply	220-240V ~ 50Hz				

(1) Cooling (EN 14511 and EN 14825) room air temperature 27 °C d.b. / 19 °C w.b.; Outside air temperature 35 °C; turbo speed; cooling line length 5 m.

(2) Heating (EN 14511 and EN 14825) Room air temperature 20°C d.b.; Outside air temperature 7 °C d.b.; / 6 °C w.b.; turbo speed; cooling line length 5 m.

(3) The nominal input power (nominal input current) is the maximum electrical input power (maximum input current) to the system, in accordance with standards EN 60335-1 and EN 60335-2-40.

(4) Sound pressure measured in a semi-anechoic chamber at a distance of 1m from the front of the unit.

# Allowed combinations of indoor units

For the MPG trialsplit and quadrisplit units, it is mandatory to install at least 2 indoor units for correct functioning of the system.

For further information, please refer to the technical documentation on the website [www.aermec.com](http://www.aermec.com)

MPG420 (14kBtu/h)		MPG520 (18kBtu/h)		MPG630 (21kBtu/h)		MPG730 (24kBtu/h)		MPG840 (28kBtu/h)		
No. indoor units										
1	2	1	2	2	3	2	3	2	3	4
7	7+7	9	7+7	7+7	7+7+7	7+7	7+7+7	7+7	7+7+7	7+7+7+7
9	7+9	12	7+9	7+9	7+7+9	7+9	7+7+9	7+9	7+7+9	7+7+7+9
12	7+12		7+12	7+12	7+7+12	7+12	7+7+12	7+12	7+7+12	7+7+7+12
	9+9		9+9	7+18	7+9+9	7+18	7+7+18	7+18	7+7+18	7+7+7+18
	9+12		9+12	9+9	7+9+12	9+9	7+9+9	9+9	7+9+9	7+7+9+9
			12+12	9+12	7+12+12	9+12	7+9+12	9+12	7+9+12	7+7+9+12
				9+18	9+9+9	9+18	7+9+18	9+18	7+9+18	7+7+9+18
				12+12	9+9+12	12+12	7+12+12	12+12	7+12+12	7+7+12+12
				12+18		12+18	9+9+9	12+18	7+12+18	7+9+9+9
						18+18	9+9+12	18+18	9+9+9	7+9+9+12
							9+9+18		9+9+12	7+9+12+12
							9+12+12		9+9+18	9+9+9+9
							12+12+12		9+12+12	9+9+9+12
									9+12+18	9+9+12+12
									12+12+12	
									12+12+18	

Reference combinations







# VRF systems





The **VRFs** are direct expansion systems, with variable refrigerant flow.

Unlike the Multisplits, which are characterised by a set flow of refrigerant, these systems allow users to adjust the amount of refrigerant in circulation, according to the actual load required by the indoor units in use.

Aermec's VRF systems allow for the installation of a minimum of 2 indoor units, up to a maximum of 80.

Their modular configuration means they cover a range from **12 kW** to **276 kW**, and there is a heat pump version with heat recovery and domestic hot water production.

These systems guarantee excellent energy efficiency, avoiding wasting energy pointlessly, and are amazingly quiet during operation.

# VRF Systems: MVA

## Comfort and energy savings - the best return on your investment

These direct expansion systems with variable refrigerant flow allow the quantity of circulating refrigerant to be modified to suit the real load request from the indoor units.

### 2-pipe heat pump

#### **Self-configuration system**

Speeds up the initial system start-up.

#### **Wide range of indoor units**

To meet any system requirement.

#### **Personalise your VRF system**

To guarantee optimum seasonal efficiency and excellent comfort with the variable refrigerant function.

#### **Continuous comfort**

Continuous heating or cooling of the rooms is what makes the VRF system a valid alternative to hydronic systems.



### 3-pipe heat pump

#### **The MVAMHR VRF heat recovery system heats and cools at the same time, with one single circuit**

MVAMHR recovers the heat produced during cooling to then heat the necessary rooms cost-free, thereby maximising energy efficiency and reducing electricity costs.

#### **Continuous comfort**

The simultaneous heating and cooling of the rooms is what makes the VRF system a valid alternative to hydronic systems.

#### **Self-configuration system**

Speeds up the initial system start-up.

#### **Wide range of indoor units**

To meet any system requirement.



## MVAS



The MVAS heat pump range is suitable for all applications - the right balance between cost, efficiency and space.

### Advantages

- Solution with limited overall dimensions, guaranteeing constantly good output levels
- Flexible installation
- Wide range of power levels available:  
**cooling capacity 22.4 kW ÷ 28.0 kW**  
**heating capacity 24.0 kW ÷ 30.0 kW**
- Inverter compressors
- Wide range of indoor units

## MVAM



The MVAM heat pump range, with its consolidated technology, offers high efficiency levels and a wide choice of power levels for any type of use.

### Advantages

- Cooling and heating in one single system
- Wide range of power levels available:  
**cooling capacity 12.1 kW ÷ 246 kW**  
**heating capacity 14.0 kW ÷ 276 kW**
- Wide range of indoor units
- High EER and COP values

## MVAMHR



The MVAMHR heat pump range is the ideal solution for continuous climate variations (both seasonal and daily), always guaranteeing optimum well-being in every room of the building.

### Advantages

- Simultaneous heating and cooling in one single system
- Cost-free heat recovery from the chilled areas, for the heated areas
- Wide range of power levels available:  
**cooling capacity 22.4 kW ÷ 180.0 kW**  
**heating capacity 25.0 kW ÷ 200.0 kW**
- Wide range of indoor units that can be combined with air treatment systems
- High EER and COP values

# Wide choice of indoor units to suit all plant engineering solutions

indoor units  
**4-WAY CASSETTE**  
**1-WAY CASSETTE**

indoor units  
**WALL**

indoor units  
**FLOOR CEILING**

indoor units  
**HORIZONTAL DUCT**  
**VERTICAL DUCT**

indoor units  
**CONSOLE**

indoor units  
**COLUMN**

indoor units  
**HEAT RECOVERY**



If you need help designing a refrigerant flow system, download the **VRF SELECTION** program from the following link:

<http://www.aermec.com/support/downloads/vrfsetup.exe>





# Complementary solutions





Aermec offers a range of specific solutions that meet a range of air conditioning requirements, as well as those relating to installation under particular structural conditions.

The Aermec portable dehumidifier limits excess humidity, above all in environments where the air is often heavy and stale.

The condensed water indoor unit, which only offers cooling function, can be combined with indoor units of different types, and is suitable in environments where external installation is not permitted, such as in historical and valuable buildings.

The automatic condensed water air conditioner allows users to condition rooms without needing to use outdoor units.

The split heat pump with inverter offers heating and cooling functions, as well as producing domestic hot water, thanks to the accumulator tank.





# DML

portable dehumidifier



- **New R290 natural refrigerant gas**
- **Compact, manoeuvrable and silent**
- **Removes up to 19.9 litres of moisture in 24 hours**

The portable dehumidifiers of the **DML** range are ideal for dehumidifying domestic areas like rooms, cellars, bathrooms and places where the washing is hung up to dry. They bring moisture back down to an ideal level because, if it's too high, it can lead to physical discomfort and the formation of mould in the room.

They fit in with any type of furnishings thanks to their compact, elegant design, and have wheels so they can easily be moved from one room to another and installed where needed (Plug & Play).

The excess moisture is removed by the dehumidifier via the intake grille, supplying moisture-free air to ensure a more healthy and comfortable setting.

Fitted with a specific basin for collecting the moisture taken out of the room during operation.

Their functions allow you to easily control the level of humidity, keeping it constant over time.





Unit		DML100	DML120	DML200
<b>Nominal performance (1)</b>				
Dehumidification capacity	l/24h	10,1	12,0	19,9
Input power	W	210	210	340
Input current	A	1.3	1.3	1,6
<b>Nominal performance (Standard EN 810) (2)</b>				
Dehumidification capacity	l/24h	5.8	6.7	12.0
<b>Electrical data</b>				
Nominal input power (3)	W	250	250	390
Nominal input power (3)	A	1.5	1.5	2.6
Hourly energy consumption	kWh/60min	0,2	0,2	0,3
<b>Fan</b>				
Type of fan	type	Axial		
Air flow rate	rated	m³/h	90	-
	max/med/min	m³/h	-	140/130/120
Sound power	rated	dB(A)	53.0	-
	max/med/min	dB(A)	-	52,0/51,0/49,0
Sound pressure	rated	dB(A)	41.0	-
	max/med/min	dB(A)	-	42,0/41,0/39,0
<b>Compressor</b>				
Type of compressor	type	Alternative		Rotary
Refrigerant:	type	R290	R290	R290
Refrigerant load	g	50	60	80
Global heating potential	GWP	3	3	3
CO <sub>2</sub> equivalent	t	0,15	0.18	0,24
<b>Condensate drainage basin</b>				
Capacity	l	1.5	1.5	3.2
<b>Power cable</b>				
Type of power cable	type	Schuko		
Power supply		220-240V ~ 50Hz		
Dimensions	mm	310x243x400	310x243x400	340x250x495

(1) Inside air temperature 30°C d.b. / 27°C w.b.

(2) Inside air temperature 27°C d.b. / 21°C w.b. (Test carried out in accordance with Standard EN 810)

(3) Test carried out in accordance with EN 60335.



# The controller for every need

A wide selection of remote controls for simple, user-friendly system management. Infrared remote controls with a backlit liquid crystal display and wired panels, for controlling all the functions.

## Remote controls



**Compatible with:**  
Monosplit: SPG, SLG  
Multisplit MLG e MPG

**Compatible with:**  
Monosplit: PSL



**Compatible with:**  
Monosplit: FK



**Compatible with:**  
Monosplit: SMG



**Compatible with:**  
Monosplit: LCG\_CS,  
LCG\_C, LCG\_D,  
LCG\_F



**Compatible with:**  
VRF system MVA

**Compatible with:**  
Monosplit: CKG\_FS  
Multisplit MLG: MLG\_FS



## Pannelli a filo




**Compatible with:**  
VRF system MVA



**Compatible with:**  
VRF system MVA




**Compatible with:**  
Monosplit: LCG\_CS, LCG\_C,  
LCG\_D, LCG\_F



**Compatible with:**  
Monosplit: LCG\_CS, LCG\_C,  
LCG\_D, LCG\_F



**Compatible with:**  
Monosplit: LCG\_CS, LCG\_C,  
LCG\_D, LCG\_F



**Compatible with:**  
Monosplit: SPG, SLG  
Multisplit MLG e MPG



**Compatible with:**  
Multisplit MPG







